



# SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

**13373-10-1104**

## Distanzklotz-Sortiment

Product group: Accessories & Tools



Adolf Würth GmbH & Co. KG  
Reinhold-Würth-Straße 12-17  
74653 Künzelsau-Gaisbach



### Product qualities:



*Köttner*

Helmut Köttner  
Scientific Director

Freiburg, 02 February 2026



# Contents

 SHI Product Assessment 2024	1
 QNG - Qualitätssiegel Nachhaltiges Gebäude	2
 DGNB New Construction 2023	3
 DGNB New Construction 2018	4
 BNB-BN Neubau V2015	5
 EU taxonomy	6
 BREEAM DE Neubau 2018	7
Product labels	8
Legal notices	9
Technical data sheet/attachments	10

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar





Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## SHI Product Assessment 2024

Since 2008, Sentinel Holding Institut GmbH (SHI) has been establishing a unique standard for products that support healthy indoor air. Experts carry out independent product assessments based on clear and transparent criteria. In addition, the independent testing company SGS regularly audits the processes and data accuracy.

Criteria	Product category	Harmful substance limit	Assessment
SHI Product Assessment	Other products	TVOC $\leq 300 \mu\text{g}/\text{m}^3$ Formaldehyd $\leq 24 \mu\text{g}/\text{m}^3$	Indoor air neutral
Valid until: 11 June 2026			



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## QNG - Qualitätssiegel Nachhaltiges Gebäude

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien	not applicable	not applicable	QNG ready - Not relevant for assessment



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## **DGNB New Construction 2023**

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	not applicable		Not relevant for assessment

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	not applicable		Not relevant for assessment



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## **DGNB New Construction 2018**

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	not applicable	not applicable	Not relevant for assessment



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## **BNB-BN Neubau V2015**

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt			Not relevant for assessment



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## **EU taxonomy**

The EU Taxonomy classifies economic activities and products according to their environmental impact. At the product level, the EU regulation defines clear requirements for harmful substances, formaldehyde and volatile organic compounds (VOCs). The Sentinel Holding Institut GmbH labels qualified products that meet this standard.

Criteria	Product type	Considered substances	Assessment
DNSH - Pollution prevention and control			Not relevant for assessment



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality			Not relevant for assessment



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



# Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.



EPD Denmark is the national programme for Environmental Product Declarations in Denmark. It ensures that registered EPDs meet the requirements of the international standards ISO 14025 and EN 15804. This is achieved through clear programme instructions that define both the competencies and the independence of third-party verifiers. Each EPD is verified by independent experts, thereby ensuring transparency, credibility, and international comparability.



This product comes with an SHI Product Passport. This innovative tool is unique in bringing together all product qualities in a single document and includes all necessary evaluations and evidence sources for the requirements according to SHI, DGNB, QNG, EU Taxonomy, BNB, and BREEAM.



Products bearing the Sentinel Holding Institute QNG-ready seal are suitable for projects aiming to achieve the "Qualitätssiegel Nachhaltiges Gebäude" (Quality Seal for Sustainable Buildings). QNG-ready products meet the requirements of QNG Appendix Document 3.1.3, "Avoidance of Harmful Substances in Building Materials." The KfW loan program Climate-Friendly New Construction with QNG may allow for additional funding.



Product:

**Distanzklotz-Sortiment**

SHI Product Passport no.:

**13373-10-1104**



## Legal notices

(\*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.

---

Find our criteria here: <https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfverfahren%20f%C3%BCr%20Produkte>

---

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar



### Publisher

Sentinel Holding Institut GmbH  
Bötzingen Str. 38  
79111 Freiburg im Breisgau  
Germany  
Tel.: +49 761 590 481-70  
[info@sentinel-holding.eu](mailto:info@sentinel-holding.eu)  
[www.sentinel-holding.eu](http://www.sentinel-holding.eu)

Owner: Knudsen Kilen A/S  
No.: MD-23135-EN  
Issued: 11-08-2023  
Valid to: 11-08-2028

3<sup>rd</sup> PARTY VERIFIED

# EPD

VERIFIED ENVIRONMENTAL PRODUCT DECLARATION | ISO 14025 & EN 15804



**Owner of declaration**  
 Knudsen Kilen A/S  
 Industrivej 21  
 DK 3300 Frederiksværk  
 CVR: 87 43 28 15

**Knudsen Kilen A/S**

**Issued:**  
 11-08-2023

**Valid to:**  
 11-08-2028

**Programme**  
 EPD Danmark  
[www.epddanmark.dk](http://www.epddanmark.dk)



- Industry EPD
- Product EPD

**Basis of calculation**

This EPD is developed in accordance with the European standard EN 15804+A2.

**Comparability**

EPDs of construction products may not be comparable if they do not comply with the requirements in EN 15804. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database.

**Validity**

This EPD has been verified in accordance with ISO 14025 and is valid for 5 years from the date of issue.

**Use**

The intended use of an EPD is to communicate scientifically based environmental information for construction products, for the purpose of assessing the environmental performance of buildings.

**EPD type**

- Cradle-to-gate with modules C1-C4 and D
- Cradle-to-gate with options, modules C1-C4 and D
- Cradle-to-grave and module D
- Cradle-to-gate
- Cradle-to-gate with options

**Declared product(s)**

Knudsen Kilen Height Adjustment Products

Number of declared datasets/product variations: 5 Product groups

This EPD covers five product groups of Knudsen Kilen Height Adjustment products: Product group 1 (Wedges, HDPE), Product group 2 (Height Adjustment Products, LDPE), Product group 3 (Combi Sole, PS), Product group 4 (Sound Reducer, Regupol) and Product group 5 (Sound Reducer Light, Regupol Resist).

**Production site**

Industrivej 21, DK 3300 Frederiksværk

No green electricity or biogas is used in A3 (production)

**Product(s) use**

The products are applied in buildings as height adjustment and levelling solutions in rafters, ceilings, windows, wall panels, sanitations, step sound reductions, roof terraces, insulation, elements, doors, wooden terraces, concrete elements and joist flows.

**Declared/ functional unit**

1 kg of Knudsen Kilen Height Adjustment Products

**Year of production site data (A3)**

2022

**EPD version**

Version 1.0

CEN standard EN 15804 serves as the core PCR

---

Independent verification of the declaration and data, according to EN ISO 14025

internal                       external

---

Third party verifier:

---

Guangli Du Aalborg University, BUILD

Martha Katrine Sørensen  
 EPD Danmark

**Life cycle stages and modules (MND = module not declared)**

Product			Construction process		Use							End of life				Beyond the system boundary
Raw material supply	Transport	Manufacturing	Transport	Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Re-use, recovery and recycling potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
<b>X</b>	<b>X</b>	<b>X</b>	MND	MND	MND	MND	MND	MND	MND	MND	MND	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>

# Product information

## Product description

This EPD covers Knudsen Kilen Height Adjustment Products. The results are shown for five different Product groups produced from different materials. The declared unit is 1 kg. In Table 1 on page 9 an overview of the weight per Height Adjustment Product for the different declared Product groups is listed.

The main material components are shown in the table below for each Product group (PG).

Material	Weight-% of declared product				
	PG1	PG2	PG3	PG4	PG5
HDPE granulate	98.5	-	-	-	-
LDPE granulate	-	98.5	-	-	-
PS granulate	-	-	97	-	-
Master batch, LDPE	1.5	1.5	-	-	-
Master batch, PS	-	-	3	-	-
Regupol	-	-	-	79	-
Regupol resist	-	-	-	-	98
Adhesive	-	-	-	21	2

## Product packaging:

The composition of the sales- and transport packaging of the product is shown in the table below.

Material	Weight-% of packaging				
	PG1	PG2	PG3	PG4	PG5
Cardboard	4.2	21.6	34.4	33.8	33.7
EU pallet, wood	46.9	50.6	65.1	65.7	65.7
Plastic wrap, LDPE	0.4	0.4	0.5	0.5	0.5
Plastic box, PP	48.5	27.4	-	-	-

## Representativity

This declaration, including data collection and the modelled foreground system including results, represents the production of 1 kg Knudsen Kilen Height Adjustment Product from the production site located in Frederiksværk, Denmark. Product specific data are based on average values collected in the period January 2022 to December 2022. Background data is based on Managed LCA Content (MLC) database from Sphera (version 2023.1) and Ecoinvent database version 3.8 and the data is less than 10 years old. Generally, the used background datasets are of high quality, and

the majority of the datasets are only a couple of years old.

## Hazardous substances

Knudsen Kilen does not contain substances listed on the "Candidate List of Substances of Very High Concern for authorisation"

(<http://echa.europa.eu/candidate-list-table>)

## Essential characteristics

Knudsen Kilen is the Danish construction industry's leading supplier of height adjustment and levelling solutions.

Knudsen Kilen height adjustment and levelling solutions are produced in accordance with the ISO 9001:200 standard. The products made from HDPE, LDPE, and PS are fire class B2/DIN 4102-1 and do not develop toxic smoke in case of fire. The products made from Regupol and Regupol resist (PU bonded rubber) are fire class EN13501-1 Class E and B2/DIN 4102-1 respectively, and develop toxic smoke in case of fire.

Furthermore, Knudsen Kilen height adjustment and levelling solutions do not split when pierced by nails and screws and are not affected by moisture, rot, or fungus.

Further technical information can be obtained by contacting the manufacturer Knudsen Kilen A/S or from their webpage:

<https://knudsenkilen.dk/knudsen-downloads>

## Reference Service Life (RSL)

Not applicable.


Knudsen Kilen height adjustment products has a lifespan of 75 years in an environment of 20 degrees celcius. This lifespan has been tested by the Danish Technological Institute for injection molded black wedges produced from secondary LDPE. More information can be found on the manufacturer's webpage or by contacting them:

<https://knudsenkilen.dk/om-knudsen/knudsen-og-miljoet>


**Picture of product(s)**

Below are pictures of the Product groups of Knudsen Kilen Height Adjustment Products, covered by this EPD.

**Product group 1**  
Wedges, HDPE



**Product group 2**  
Height Adjustment Products, LDPE



**Product group 3**  
Combi Sole, PS



**Product group 4**  
Sound Reducer, Regupol



**Product group 5**  
Sound Reducer Light, Regupol Resist



The declared Product groups are "Wedges, HDPE", "Height Adjustment Products, LDPE", "Combi Sole, PS", "Sound reducer, Regupol" and "Sound Reducer Light, Regupol Resist".

Within Knudsen Kilen Height Adjustment Products, there are several different product types, which are listed in Table 1.

# LCA background

## Declared unit

The LCI and LCIA results in this EPD relates to the declared unit of 1 kg Knudsen Kilen Height Adjustment Products, used for different places in the building.

Name	Value	Unit
Declared unit	1	kg
Density	PG1: 960 PG2: 910-925 PG3: 1030 PG4: 687±25% PG5: 730	kg/m <sup>3</sup>
Conversion factor to 1 kg	1	kg/kg

The weights per Height Adjustment Product are listed in Table 1 on page 9.

A mass-based allocation factor was used to allocate energy use in production and energy use for utilities at the factory among the different products produced at the factory. Linearity between the energy use of the injection molding machines and produced mass is assumed.

## Functional unit

Not defined.

## PCR

This EPD is developed according to the core rules for the product category of construction products in EN 15804:2012+A2:2019, which serves as the core PCR.

## Guarantee of Origin – certificates


Foreground system:

No use of certified green electricity in the foreground system. The products are produced using electricity modelled as Danish residual electricity mix from 2021 in the production.

Background system:

No use of certified green electricity in the background system. Upstream processes are modelled using national energy mixes. Downstream processes are modelled using national energy mixes.

## Flow diagram

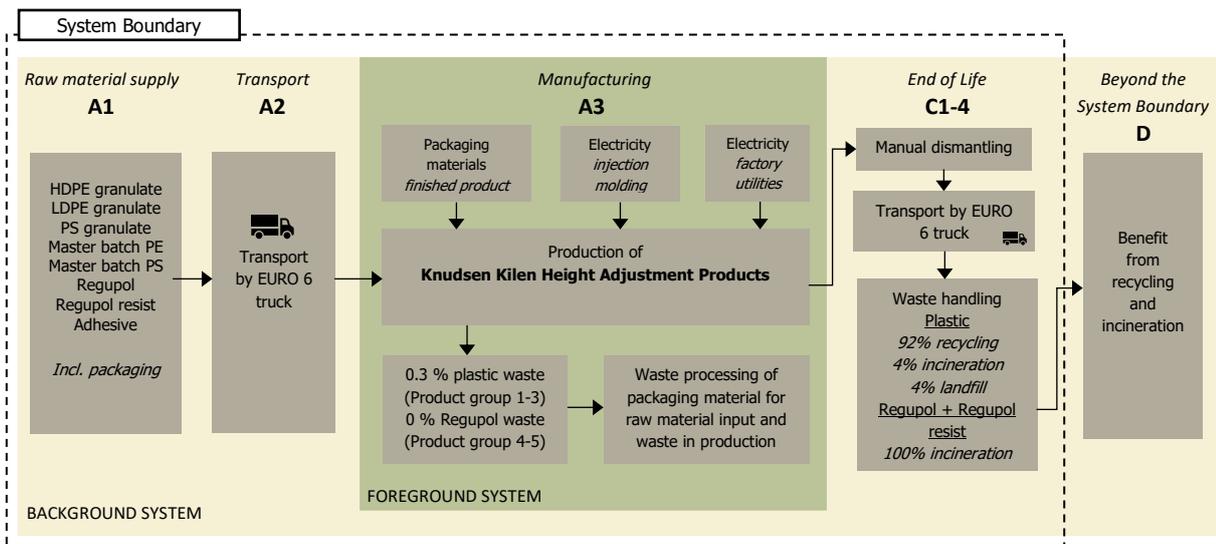

### System boundary

This EPD is based on a cradle-to-gate LCA with life cycle modules A1-3, C1-4 and D declared, in which 100 weight-% has been accounted for. In the production of 1 kg Knudsen Kilen Height Adjustment Products, a waste of 0.3% occurs in Product group 1-3 and 0% occurs in Product group 4-5 in production in module A3.

The general rules for the exclusion of inputs and outputs follows the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes. Packaging material for some of the raw materials in module A1 has been excluded as no data was available. This exclusion of data is in alignment with the requirements in EN 15804.

#### **Product stage (A1-A3) includes:**

- A1 – Extraction and processing of raw materials
- A2 – Transport to the production site
- A3 – Manufacturing processes

The product stage comprises the acquisition of all raw materials, products and energy, transport to the production site, packaging and waste processing up to the “end-of-waste” state or final disposal. The LCA results are declared in aggregated form for the product stage, which means, that the sub-modules A1, A2 and A3 are declared as one module A1-A3.

The product stage includes raw materials as input material, transport to the manufacturer’s production site in Frederiksværk, electricity for plastic injection molding machines and utilities at the factory site, packaging materials for the finished declared product as well as waste processing of the material waste in production and the raw materials’ packaging materials up to the “end-of-waste” state or final disposal, according to EN15804+A2 §6.3.5.2.

The production of the declared Knudsen Kilen Height Adjustment Products is located at the manufacturer’s factory in Frederiksværk, Denmark. The raw materials in module A1 are high density polyethylene (HDPE) granulates and LDPE master batch (MB, coloring) for Product group 1, low density polyethylene (LDPE)

granulates (secondary material) and LDPE master batch for Product group 2, polystyrene (PS) granulates and PS master batch for Product group 3, Regupol (rubber bond with polyurethane) and adhesive (scrim tape) for Product group 4 as well as Regupol resist (secondary material: rubber bond with polyurethane) and adhesive (scrim tape) for Product group 5.

The packaging materials for the above-mentioned raw materials are octabins (cardboard box) on wood pallets and plastic bags. Packaging materials for regupol, regupol resist and adhesive have been excluded from the LCA according to the cut-off rules.

The transport of the raw materials in module A2 is also included in the product stage and consists of transport by truck from Egypt, Sweden, Belgium, and Denmark.

The production at the factory in Frederiksværk consists of plastic injection molding processes for Product group 1-3 and manual assembling of regupol, regupol resist and adhesive for Product group 4-5. Besides electricity consumption for the plastic injection molding machines, electricity consumption for utilities at the factory is also included in the product stage.

Once the height adjustment products 1-3 have been injection molded, and Product group 4-5 have been manually assembled, the products are packaged with packaging materials consisting of EU pallets (wood), plastic wrap, cardboard and plastic boxes. All these packaging materials are also included in the product stage in module A3. The EU pallets (wood) are assumed reused 25 times before disposal (EPD Denmark, 2023) (Environment, 2021). Thus, the modelling has been done accordingly with 1/25 virgin material input and 24/25 secondary input material. For the packaging materials in A3 the biogenic carbon content from renewable materials (cardboard and wood), is calculated based on the standard EN16485 as 0.5 kg C/kg dry matter. The cardboard has a moisture content of 7.5% (Mahakalkar, Sambare, & Sunheriya, 2019) and the wood has a moisture content of 15%. The biogenic carbon content is calculated from 100% of the material weight input. There is no biogenic carbon content in the declared product leaving the system boundary.

The packaging materials for the raw material input appearing in module A1 and the waste in production are treated up to “end-of-waste-state” in module A3. This includes waste treatment of plastic, wood, and cardboard. The plastic is modelled with a waste treatment of 92% recycling, 4% incineration and 4% landfill and the cardboard is modelled with a waste treatment of 99.4% recycling and 0.6% incineration, based on national Danish waste statistics from 2020 for the building and construction waste (Miljøministeriet Miljøstyrelsen, 2020). The wood is modelled with a waste treatment of 100% incineration as it is informed by the manufacturer that the wood pallets are single-service pallets. The recycling treatment is modelled as part of module A3, and impacts relating to the treatment is reported as part of module A3.

As stated in EN15804+A2 §6.3.5.2 the flows leaving the system at the end-of-waste state of the boundary of A1-3 (waste from production and packaging material from raw material inputs) shall be allocated as co-products and loads and benefits from these flows shall not be declared in module D. This rule is applied to handle all waste treatment from A1-3 in module A3 and no potential load and benefits from these waste processes are declared in module D.

#### **End of Life (C1-C4) includes:**

Module C1 is assumed to be zero using manual dismantling.

In C2, the transport distances scenario is set to 50 km by truck based on a Danish national scenario.

In module C3-C4, 92% of the plastic from Product group 1-3 is recycled, 4% is incinerated and 4% is landfilled. This waste scenario is based on national Danish waste statistics from 2020 (Miljøministeriet Miljøstyrelsen, 2020). In module C3-C4, 100% of the regupol, regupol resist and adhesive in Product group 4-5 is modelled incinerated.

The generated waste in module C3-4 is included up to the “end-of-waste” state, including a process for sorting of waste at the waste facility before the plastic materials are recycled.

The potential from the recycling and incineration of the materials beyond the system boundary is calculated in module D.

#### **Re-use, recovery and recycling potential (D) includes:**

Module D includes reuse, recovery and/or recycling potential, expressed as net impact and benefits, due to reuse, recycling and incineration of materials with energy recovery in module C3.

To calculate the amount of net-scrap for credit in module D, the secondary input material in A1 has been deducted from the amount of material for recycling and incineration credit in module D. This calculation rules takes effect in Product group 2 where the LDPE granulated input is 100% secondary material input and in Product group 5, where the regupol resist is 100% secondary material input.

In Product group 1-3 the plastic has a recycling rate of 92%. The credit is calculated as the difference between production of new plastic granulates and the production of plastic granulates from secondary material. The process for production of plastic granulates from secondary material, calculates that an input of 1.19 kg plastic is needed to produce 1 kg of plastic granulates from secondary material.

By crediting the difference between these two production types, the impacts from producing plastic granulates from secondary plastic material are subtracted from the potentially avoided impacts of producing primary plastic granulates. This ensures that overestimating of the credit in module D is avoided.

In Product group 1-3, 4% of the plastic is incinerated with energy recovery. For Product group 4-5 regupol, 100% of the plastic is incinerated with energy recovery. The energy recovery is credited in module D and the energy recovered is based on the calorific values of the different raw materials. Datasets for energy recovery efficiency at the plant have been adjusted to be representative of the efficiency for heat and electricity recovery at Danish combined heating and power plants (CPH plant). The total efficiency for CHP plants in Denmark is around 85-90% (Hjørring Varmeforsyning, 2023),

(Støvring Kraftvarmeværk, 2023), (Hofor, 2023), (Rambøll, 2023), (Lundgren, 2009). The efficiency for electricity is set to 43.5% and the efficiency for heat (steam) is set to 45.5%, which

is based on average values from actual CHP plants in Denmark (Hjørring Varmeforsyning, 2023), (Støvring Kraftvarmeværk, 2023).

**Table 1 - Weight of different Knudsen Kilen Height Adjustment Products and specification of declared product group**

Product and product no.	Weight per piece [g]	Conversion factor to 1 kg	Material*	Declared Product group
<b>Product type: Wedges</b>				
Green (80x30x10mm) product no. 910200080	6.94	0.00694	HDPE	Product group 1
Orange (80x40x8mm) product no. 928700110	6.88	0.00688	HDPE	Product group 1
Brown (90x45x15mm) product no. 971116080	12.44	0.01244	LDPE	Product group 2
Yellow (150x45x25mm) product no. 911300068	34.69	0.03469	LDPE	Product group 2
Terrace, black (150x45x25mm) product no. 911300030	34.50	0.0345	LDPE	Product group 2
Grey (150x45x50mm) product no. 9061904122D	83.16	0.08316	LDPE	Product group 2
Black (150x45x70mm) product no. 9062004032D	123.09	0.12309	LDPE	Product group 2
<b>Product type: Combi wedges</b>				
Combi top small (80x43x19mm) product no. 975308120	12.50	0.01250	LDPE	Product group 2
Combi top medium (130x43x28mm) product no. 975408120	26.29	0.02629	LDPE	Product group 2
Combi base (100x80x40mm) product no. 975108120	56.00	0.05600	LDPE	Product group 2
Combi sole (Ø160mm) product no. 989502120	59.17	0.05917	PS	Product group 3
<b>Product type: Combi max</b>				
Combi max top product no. 986408220	32.74	0.03274	LDPE	Product group 2
Combi max high product no. 985104221	110.25	0.11025	LDPE	Product group 2
<b>Product type: Shims</b>				
Blue (50x22x1mm) product no. 987316051	1.11	0.00111	LDPE	Product group 2
Black (50x22x2mm) product no. 987316031	2.01	0.00201	LDPE	Product group 2
Red (50x22x3mm) product no. 987316041	2.93	0.00293	LDPE	Product group 2
White (50x22x4mm) product no. 987316021	4.03	0.00403	LDPE	Product group 2
Yellow (50x22x5mm) product no. 987316061	4.92	0.00492	LDPE	Product group 2
Blue (100x22x1mm) product no. 987316050	2.18	0.00218	LDPE	Product group 2
Black (100x22x2mm) product no. 987316030	3.83	0.00383	LDPE	Product group 2
Red (100x22x3mm) product no. 987316040	5.71	0.00571	LDPE	Product group 2
White (100x22x4mm) product no. 987316020	7.69	0.00769	LDPE	Product group 2
Yellow (100x22x5mm) product no. 987316060	9.49	0.00949	LDPE	Product group 2
<b>Product type: Hanger shims</b>				
Blue (54x46x1mm) product no. 973204050	1.15	0.00115	LDPE	Product group 2
Black (54x46x2mm) product no. 973204030	1.87	0.00187	LDPE	Product group 2
Red (54x46x3mm) product no. 973204040	2.45	0.00245	LDPE	Product group 2
White (54x46x4mm) product no. 973204010	3.05	0.00305	LDPE	Product group 2
Yellow (54x46x5mm) product no. 973204060	3.66	0.00366	LDPE	Product group 2

Brown (54x46x10mm) product no. 973204220	6.46	0.00646	LDPE	Product group 2
<b>Product type: Sound wedges</b>				
Yellow wedge w/sound reducer product no. 8701212K	64.00	0.064	Combi	Combi
	<i>34.00</i>	<i>0.034</i>	LDPE	Product group 2
	<i>30.00</i>	<i>0.030</i>	Regupol	Product group 4
Combi Top Medium wedge w/sound reducer product no. 8701214K	50.00	0.050	Combi	Combi
	<i>26.00</i>	<i>0.026</i>	LDPE	Product group 2
	<i>24.00</i>	<i>0.024</i>	Regupol	Product group 4
Combi top large w/sound reducer product no. 8701217K	70.00	0.070	Combi	Combi
	<i>46.00</i>	<i>0.046</i>	LDPE	Product group 2
	<i>24.00</i>	<i>0.024</i>	Regupol	Product group 4
Combi sound reducer product no. 8701210K	48.00	0.048	Combi	Combi
	<i>14.00</i>	<i>0.014</i>	HDPE	Product group 1
	<i>34.00</i>	<i>0.034</i>	Regupol	Product group 4
Combi sound reducer light product no. 8701209K	74.00	0.074	Combi	Combi
	<i>14.00</i>	<i>0.014</i>	HDPE	Product group 1
	<i>60.00</i>	<i>0.060</i>	Regupol resist	Product group 5

\* LDPE = low density polyethylene

HDPE = high density polyethylene

PS = polystyrene

Regupol = polyurethane bonded rubber fibers

Regupol resist = polyurethane bonded rubber fibers made from secondary material

Combi = combination of two declared Product groups to calculate the impacts related to these specific products

# LCA results

Product group 1 Wedges, HDPE

ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Wedges, HDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	1.42E+00	5.58E-01	1.24E+00	3.22E+00	0.00E+00	4.34E-03	1.36E-01	2.80E-03	-9.21E-01
GWP-fossil	[kg CO <sub>2</sub> eq.]	1.51E+00	5.51E-01	1.23E+00	3.29E+00	0.00E+00	4.29E-03	1.35E-01	2.84E-03	-9.12E-01
GWP-biogenic	[kg CO <sub>2</sub> eq.]	-9.06E-02	1.63E-03	1.31E-02	-7.60E-02	0.00E+00	1.27E-05	1.68E-04	-3.24E-05	-8.97E-03
GWP-luluc	[kg CO <sub>2</sub> eq.]	3.55E-04	5.11E-03	3.02E-04	5.77E-03	0.00E+00	3.98E-05	2.13E-06	2.26E-06	-1.07E-04
ODP	[kg CFC 11 eq.]	2.05E-09	7.18E-14	4.23E-10	2.48E-09	0.00E+00	5.59E-16	2.53E-09	4.62E-15	-2.01E-12
AP	[mol H <sup>+</sup> eq.]	2.68E-03	8.22E-04	1.29E-03	4.79E-03	0.00E+00	6.40E-06	7.42E-05	8.25E-06	-1.37E-03
EP-freshwater	[kg P eq.]	8.98E-06	2.02E-06	1.66E-06	1.27E-05	0.00E+00	1.57E-08	6.65E-07	5.30E-07	-3.36E-07
EP-marine	[kg N eq.]	6.83E-04	3.00E-04	4.11E-04	1.39E-03	0.00E+00	2.34E-06	2.59E-05	1.89E-06	-4.18E-04
EP-terrestrial	[mol N eq.]	7.04E-03	3.54E-03	4.37E-03	1.49E-02	0.00E+00	2.76E-05	3.14E-04	2.08E-05	-4.22E-03
POCP	[kg NMVOC eq.]	2.97E-03	7.22E-04	1.27E-03	4.95E-03	0.00E+00	5.62E-06	8.15E-05	6.00E-06	-1.96E-03
ADPm <sup>1</sup>	[kg Sb eq.]	2.44E-07	3.63E-08	5.84E-08	3.38E-07	0.00E+00	2.83E-10	3.42E-08	7.27E-11	-5.50E-08
ADPf <sup>1</sup>	[MJ]	6.68E+01	7.51E+00	2.55E+01	9.98E+01	0.00E+00	5.85E-02	2.07E-01	4.11E-02	-4.80E+01
WDP <sup>1</sup>	[m <sup>3</sup> ]	5.72E-02	6.67E-03	4.33E-02	1.07E-01	0.00E+00	5.19E-05	2.26E-02	-3.88E-05	1.74E-02
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use									
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Wedges, HDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	3.37E-08	6.81E-09	1.34E-08	5.39E-08	0.00E+00	5.30E-11	5.06E-09	8.00E-11	-1.66E-08
IRP <sup>2</sup>	[kBq U235 eq.]	3.36E-02	2.10E-03	1.48E-01	1.84E-01	0.00E+00	1.64E-05	1.89E-03	7.19E-05	5.88E-02
ETP-fw <sup>1</sup>	[CTUe]	3.03E+01	5.34E+00	8.42E+00	4.40E+01	0.00E+00	4.16E-02	1.82E-01	3.91E-02	-2.14E+01
HTP-c <sup>1</sup>	[CTUh]	8.57E-10	1.09E-10	2.09E-10	1.18E-09	0.00E+00	8.51E-13	6.78E-12	1.80E-12	-5.36E-10
HTP-nc <sup>1</sup>	[CTUh]	3.35E-08	5.82E-09	8.50E-09	4.78E-08	0.00E+00	4.54E-11	1.08E-10	1.50E-10	-2.40E-08
SQP <sup>1</sup>	-	1.25E+01	3.14E+00	4.90E+00	2.06E+01	0.00E+00	2.45E-02	4.76E-01	3.56E-03	-3.72E+00
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)									
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. <sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.									

RESOURCE USE PER 1 kg Knudsen Kilen Wedges, HDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	-3.97E+01	5.47E-01	-3.33E+00	-4.24E+01	0.00E+00	4.26E-03	4.18E+01	1.74E+00	-2.20E+00
PERM	[MJ]	4.36E+01	0.00E+00	6.50E+00	5.01E+01	0.00E+00	0.00E+00	-4.18E+01	-1.74E+00	0.00E+00
PERT	[MJ]	3.98E+00	5.47E-01	3.17E+00	7.69E+00	0.00E+00	4.26E-03	2.18E-02	3.71E-03	-2.20E+00
PENRE	[MJ]	6.57E+01	7.54E+00	2.37E+01	9.70E+01	0.00E+00	5.87E-02	2.08E-01	4.11E-02	-4.80E+01
PENRM	[MJ]	1.07E+00	0.00E+00	1.80E+00	2.86E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	6.68E+01	7.54E+00	2.55E+01	9.98E+01	0.00E+00	5.87E-02	2.08E-01	4.11E-02	-4.80E+01
SM	[kg]	0.00E+00	0.00E+00	1.42E-01	1.42E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	7.90E-03	5.99E-04	3.42E-03	1.19E-02	0.00E+00	4.66E-06	5.28E-04	4.05E-07	-3.90E-03
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water									

WASTE CATEGORIES AND OUTPUT FLOWS PER 1 kg Knudsen Kilen Wedges, HDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	1.84E-08	2.34E-11	5.22E-09	2.37E-08	0.00E+00	1.82E-13	3.35E-13	3.46E-12	-4.09E-09
NHWD	[kg]	2.00E-02	1.15E-03	9.40E-03	3.05E-02	0.00E+00	8.96E-06	4.97E-04	3.98E-02	7.90E-02
RWD	[kg]	2.89E-04	1.41E-05	1.30E-03	1.61E-03	0.00E+00	1.10E-07	8.96E-07	4.86E-07	2.60E-04
CRU	[kg]	0.00E+00								
MFR	[kg]	0.00E+00	0.00E+00	4.41E-02	4.41E-02	0.00E+00	0.00E+00	9.20E-01	0.00E+00	0.00E+00
MER	[kg]	0.00E+00								
EE	[MJ]	0.00E+00	0.00E+00	7.92E-01	7.92E-01	0.00E+00	0.00E+00	1.55E+00	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy									

BIOGENIC CARBON CONTENT PER 1 kg Knudsen Kilen Wedges, HDPE		
Parameter	Unit	At the factory gate
Biogenic carbon content in product	kg C	0.00E+0
Biogenic carbon content in accompanying packaging	kg C	6.82E-02
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

Product group 2 Height Adjustment products, LDPE

ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Height Adjustment products, LDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	3.76E-01	1.06E-02	7.36E-01	1.12E+00	0.00E+00	4.34E-03	1.36E-01	2.80E-03	-1.70E-02
GWP-fossil	[kg CO <sub>2</sub> eq.]	3.73E-01	1.04E-02	8.13E-01	1.20E+00	0.00E+00	4.29E-03	1.35E-01	2.84E-03	-1.68E-02
GWP-biogenic	[kg CO <sub>2</sub> eq.]	3.01E-03	3.08E-05	-7.76E-02	-7.46E-02	0.00E+00	1.27E-05	1.68E-04	-3.24E-05	-1.63E-04
GWP-luluc	[kg CO <sub>2</sub> eq.]	4.51E-05	9.67E-05	3.40E-04	4.81E-04	0.00E+00	3.98E-05	2.13E-06	2.26E-06	-2.07E-06
ODP	[kg CFC 11 eq.]	2.05E-09	1.36E-15	1.30E-11	2.06E-09	0.00E+00	5.59E-16	2.53E-09	4.62E-15	-1.11E-13
AP	[mol H <sup>+</sup> eq.]	1.02E-03	1.56E-05	8.20E-04	1.85E-03	0.00E+00	6.40E-06	7.42E-05	8.25E-06	-2.51E-05
EP-freshwater	[kg P- eq.]	8.51E-06	3.82E-08	1.64E-06	1.02E-05	0.00E+00	1.57E-08	6.65E-07	5.30E-07	-2.32E-08
EP-marine	[kg N eq.]	1.56E-04	5.68E-06	2.91E-04	4.53E-04	0.00E+00	2.34E-06	2.59E-05	1.89E-06	-7.79E-06
EP-terrestrial	[mol N eq.]	1.60E-03	6.71E-05	3.06E-03	4.72E-03	0.00E+00	2.76E-05	3.14E-04	2.08E-05	-7.90E-05
POCP	[kg NMVOC eq.]	4.42E-04	1.37E-05	8.35E-04	1.29E-03	0.00E+00	5.62E-06	8.15E-05	6.00E-06	-2.52E-05
ADPm <sup>1</sup>	[kg Sb eq.]	1.87E-07	6.88E-10	3.26E-08	2.20E-07	0.00E+00	2.83E-10	3.42E-08	7.27E-11	-1.36E-09
ADPf <sup>1</sup>	[MJ]	5.79E+00	1.42E-01	1.49E+01	2.08E+01	0.00E+00	5.85E-02	2.07E-01	4.11E-02	-7.63E-01
WDP <sup>1</sup>	[m <sup>3</sup> ]	8.74E-02	1.26E-04	2.15E-02	1.09E-01	0.00E+00	5.19E-05	2.26E-02	-3.88E-05	1.73E-04
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use									
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Height Adjustment products, LDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	6.00E-09	1.29E-10	9.79E-09	1.59E-08	0.00E+00	5.30E-11	5.06E-09	8.00E-11	-1.82E-10
IRP <sup>2</sup>	[kBq U235 eq.]	1.14E-01	3.99E-05	1.01E-01	2.15E-01	0.00E+00	1.64E-05	1.89E-03	7.19E-05	4.55E-04
ETP-fw <sup>1</sup>	[CTUe]	3.04E+00	1.01E-01	4.25E+00	7.39E+00	0.00E+00	4.16E-02	1.82E-01	3.91E-02	-3.38E-01
HTP-c <sup>1</sup>	[CTUh]	2.06E-10	2.07E-12	1.06E-10	3.14E-10	0.00E+00	8.51E-13	6.78E-12	1.80E-12	-8.87E-12
HTP-nc <sup>1</sup>	[CTUh]	3.11E-09	1.10E-10	4.49E-09	7.72E-09	0.00E+00	4.54E-11	1.08E-10	1.50E-10	-3.77E-10
SQP <sup>1</sup>	-	1.83E+00	5.95E-02	5.17E+00	7.06E+00	0.00E+00	2.45E-02	4.76E-01	3.56E-03	-8.30E-02
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)									
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. <sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.									

RESOURCE USE PER 1 kg Knudsen Kilen Height Adjustment products, LDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	-4.10E+01	1.04E-02	2.99E-01	-4.07E+01	0.00E+00	4.26E-03	4.18E+01	1.74E+00	-7.20E-02
PERM	[MJ]	4.36E+01	0.00E+00	2.39E+00	4.60E+01	0.00E+00	0.00E+00	-4.18E+01	-1.74E+00	0.00E+00
PERT	[MJ]	2.61E+00	1.04E-02	2.69E+00	5.31E+00	0.00E+00	4.26E-03	2.18E-02	3.71E-03	-7.20E-02
PENRE	[MJ]	5.79E+00	1.43E-01	1.23E+01	1.82E+01	0.00E+00	5.87E-02	2.08E-01	4.11E-02	-7.63E-01
PENRM	[MJ]	0.00E+00	0.00E+00	2.61E+00	2.61E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	5.79E+00	1.43E-01	1.49E+01	2.08E+01	0.00E+00	5.87E-02	2.08E-01	4.11E-02	-7.63E-01
SM	[kg]	9.88E-01	0.00E+00	1.03E-01	1.09E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	3.11E-03	1.13E-05	2.30E-03	5.42E-03	0.00E+00	4.66E-06	5.28E-04	4.05E-07	-7.52E-05
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water									

WASTE CATEGORIES AND OUTPUT FLOWS PER 1 kg Knudsen Kilen Height Adjustment products, LDPE										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	-1.93E-10	4.42E-13	1.46E-08	1.44E-08	0.00E+00	1.82E-13	3.35E-13	3.46E-12	-5.36E-11
NHWD	[kg]	1.23E-01	2.18E-05	6.35E-03	1.29E-01	0.00E+00	8.96E-06	4.97E-04	3.98E-02	1.19E-03
RWD	[kg]	6.76E-04	2.67E-07	8.77E-04	1.55E-03	0.00E+00	1.10E-07	8.96E-07	4.86E-07	-1.54E-07
CRU	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	[kg]	0.00E+00	0.00E+00	2.84E-03	2.84E-03	0.00E+00	0.00E+00	1.38E-02	0.00E+00	0.00E+00
MER	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	[MJ]	0.00E+00	0.00E+00	1.19E-02	1.19E-02	0.00E+00	0.00E+00	2.32E-02	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy									

BIOGENIC CARBON CONTENT PER 1 kg Knudsen Kilen Height Adjustment products, LDPE		
Parameter	Unit	At the factory gate
Biogenic carbon content in product	kg C	0.00E+0
Biogenic carbon content in accompanying packaging	kg C	6.59E-02
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

Product group 3 Combi Sole, PS

ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Combi Sole, PS										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	2.12E+00	7.92E-02	5.92E-01	2.79E+00	0.00E+00	4.34E-03	1.45E-01	2.80E-03	-1.40E+00
GWP-fossil	[kg CO <sub>2</sub> eq.]	2.11E+00	7.82E-02	6.79E-01	2.87E+00	0.00E+00	4.29E-03	1.45E-01	2.84E-03	-1.39E+00
GWP-biogenic	[kg CO <sub>2</sub> eq.]	1.29E-02	2.31E-04	-8.74E-02	-7.43E-02	0.00E+00	1.27E-05	1.68E-04	-3.24E-05	-8.28E-03
GWP-luluc	[kg CO <sub>2</sub> eq.]	1.52E-04	7.25E-04	3.23E-04	1.20E-03	0.00E+00	3.98E-05	2.13E-06	2.26E-06	-9.06E-05
ODP	[kg CFC 11 eq.]	4.09E-09	1.02E-14	2.61E-11	4.11E-09	0.00E+00	5.59E-16	2.53E-09	4.62E-15	-9.89E-13
AP	[mol H <sup>+</sup> eq.]	3.92E-03	1.17E-04	6.05E-04	4.64E-03	0.00E+00	6.40E-06	7.36E-05	8.25E-06	-2.05E-03
EP-freshwater	[kg P- eq.]	1.43E-05	2.86E-07	1.55E-06	1.61E-05	0.00E+00	1.57E-08	6.65E-07	5.29E-07	-8.32E-07
EP-marine	[kg N eq.]	8.75E-04	4.26E-05	2.39E-04	1.16E-03	0.00E+00	2.34E-06	2.59E-05	1.89E-06	-6.00E-04
EP-terrestrial	[mol N eq.]	9.33E-03	5.03E-04	2.50E-03	1.23E-02	0.00E+00	2.76E-05	3.11E-04	2.08E-05	-6.37E-03
POCP	[kg NMVOC eq.]	3.28E-03	1.02E-04	6.37E-04	4.02E-03	0.00E+00	5.62E-06	8.13E-05	6.00E-06	-2.28E-03
ADPm <sup>1</sup>	[kg Sb eq.]	3.81E-07	5.16E-09	2.48E-08	4.11E-07	0.00E+00	2.83E-10	3.42E-08	7.27E-11	-5.15E-08
ADPf <sup>1</sup>	[MJ]	7.25E+01	1.07E+00	1.02E+01	8.37E+01	0.00E+00	5.85E-02	2.07E-01	4.11E-02	-5.26E+01
WDP <sup>1</sup>	[m <sup>3</sup> ]	2.05E-01	9.46E-04	1.16E-02	2.17E-01	0.00E+00	5.19E-05	2.20E-02	-3.88E-05	-7.55E-02
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use									
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Combi Sole, PS										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	2.20E-08	9.66E-10	8.26E-09	3.12E-08	0.00E+00	5.30E-11	5.06E-09	8.00E-11	-1.25E-08
IRP <sup>2</sup>	[kBq U235 eq.]	3.45E-02	2.99E-04	8.96E-02	1.24E-01	0.00E+00	1.64E-05	1.89E-03	7.19E-05	5.71E-02
ETP-fw <sup>1</sup>	[CTUe]	4.15E+01	7.58E-01	2.07E+00	4.44E+01	0.00E+00	4.16E-02	1.82E-01	3.91E-02	-2.98E+01
HTP-c <sup>1</sup>	[CTUh]	1.09E-09	1.55E-11	5.07E-11	1.15E-09	0.00E+00	8.51E-13	6.72E-12	1.80E-12	-6.25E-10
HTP-nc <sup>1</sup>	[CTUh]	3.58E-08	8.27E-10	2.30E-09	3.89E-08	0.00E+00	4.54E-11	1.07E-10	1.50E-10	-2.60E-08
SQP <sup>1</sup>	-	1.63E+00	4.46E-01	4.99E+00	7.07E+00	0.00E+00	2.45E-02	4.76E-01	3.56E-03	-3.11E+00
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)									
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. <sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.									

RESOURCE USE PER 1 kg Knudsen Kilen Combi Sole, PS										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	-3.79E+01	7.76E-02	2.63E+00	-3.52E+01	0.00E+00	4.26E-03	3.80E+01	1.59E+00	-1.60E+00
PERM	[MJ]	4.00E+01	0.00E+00	-3.29E-01	3.96E+01	0.00E+00	0.00E+00	-3.80E+01	-1.58E+00	0.00E+00
PERT	[MJ]	2.04E+00	7.76E-02	2.30E+00	4.41E+00	0.00E+00	4.26E-03	2.18E-02	3.71E-03	-1.60E+00
PENRE	[MJ]	7.26E+01	1.07E+00	7.66E+00	8.13E+01	0.00E+00	5.87E-02	2.07E-01	4.11E-02	-5.26E+01
PENRM	[MJ]	0.00E+00	0.00E+00	2.53E+00	2.53E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	7.26E+01	1.07E+00	1.02E+01	8.38E+01	0.00E+00	5.87E-02	2.07E-01	4.11E-02	-5.26E+01
SM	[kg]	0.00E+00	0.00E+00	9.36E-02	9.36E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	1.20E-02	8.50E-05	1.77E-03	1.39E-02	0.00E+00	4.66E-06	5.13E-04	4.05E-07	-6.89E-03
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water									

WASTE CATEGORIES AND OUTPUT FLOWS PER 1 kg Knudsen Kilen Combi Sole, PS										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	4.87E-09	3.32E-12	1.61E-08	2.10E-08	0.00E+00	1.82E-13	3.36E-13	3.46E-12	-3.47E-09
NHWD	[kg]	1.77E-02	1.63E-04	5.37E-03	2.32E-02	0.00E+00	8.95E-06	4.87E-04	3.98E-02	7.98E-02
RWD	[kg]	2.57E-04	2.00E-06	7.66E-04	1.03E-03	0.00E+00	1.10E-07	8.96E-07	4.86E-07	2.72E-04
CRU	[kg]	0.00E+00								
MFR	[kg]	0.00E+00	0.00E+00	7.93E-03	7.93E-03	0.00E+00	0.00E+00	9.20E-01	0.00E+00	0.00E+00
MER	[kg]	0.00E+00								
EE	[MJ]	0.00E+00	0.00E+00	7.21E-01	7.21E-01	0.00E+00	0.00E+00	1.41E+00	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy									

BIOGENIC CARBON CONTENT PER 1 kg Knudsen Kilen Combi Sole, PS		
Parameter	Unit	At the factory gate
Biogenic carbon content in product	kg C	0.00E+0
Biogenic carbon content in accompanying packaging	kg C	6.47E-02
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

Product group 4 Sound Reducer, Regupol

ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Sound Reducer, Regupol										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	2.69E+00	2.68E-02	1.07E-01	2.82E+00	0.00E+00	4.34E-03	2.21E+00	0.00E+00	-8.03E-01
GWP-fossil	[kg CO <sub>2</sub> eq.]	2.69E+00	2.65E-02	1.78E-01	2.90E+00	0.00E+00	4.29E-03	2.21E+00	0.00E+00	-7.91E-01
GWP-biogenic	[kg CO <sub>2</sub> eq.]	-1.04E-02	7.84E-05	-7.12E-02	-8.16E-02	0.00E+00	1.27E-05	1.58E-04	0.00E+00	-1.13E-02
GWP-luluc	[kg CO <sub>2</sub> eq.]	2.35E-03	2.46E-04	2.23E-04	2.82E-03	0.00E+00	3.98E-05	3.53E-06	0.00E+00	-2.57E-04
ODP	[kg CFC 11 eq.]	5.92E-07	3.45E-15	1.02E-12	5.92E-07	0.00E+00	5.59E-16	1.78E-13	0.00E+00	-1.61E-11
AP	[mol H <sup>+</sup> eq.]	1.51E-02	3.96E-05	2.26E-04	1.53E-02	0.00E+00	6.40E-06	1.30E-03	0.00E+00	-2.76E-03
EP-freshwater	[kg P- eq.]	8.45E-04	9.71E-08	1.14E-06	8.47E-04	0.00E+00	1.57E-08	4.83E-08	0.00E+00	-1.21E-05
EP-marine	[kg N eq.]	2.48E-03	1.44E-05	9.61E-05	2.59E-03	0.00E+00	2.34E-06	6.30E-04	0.00E+00	-9.03E-04
EP-terrestrial	[mol N eq.]	2.59E-02	1.71E-04	9.80E-04	2.70E-02	0.00E+00	2.76E-05	7.25E-03	0.00E+00	-7.69E-03
POCP	[kg NMVOC eq.]	1.65E-02	3.47E-05	2.48E-04	1.68E-02	0.00E+00	5.62E-06	1.62E-03	0.00E+00	-2.03E-03
ADPm <sup>1</sup>	[kg Sb eq.]	4.76E-05	1.75E-09	1.54E-08	4.76E-05	0.00E+00	2.83E-10	1.70E-09	0.00E+00	-3.12E-07
ADPf <sup>1</sup>	[MJ]	7.67E+01	3.62E-01	2.69E+00	7.97E+01	0.00E+00	5.85E-02	5.83E-01	0.00E+00	-1.08E+01
WDP <sup>1</sup>	[m <sup>3</sup> ]	2.05E+00	3.21E-04	5.22E-03	2.06E+00	0.00E+00	5.19E-05	2.17E-01	0.00E+00	-1.42E-01
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use									
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Sound Reducer, Regupol										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	1.67E-07	3.28E-10	3.95E-09	1.71E-07	0.00E+00	5.30E-11	3.60E-09	0.00E+00	-2.04E-08
IRP <sup>2</sup>	[kBq U235 eq.]	4.49E-01	1.01E-04	2.16E-02	4.71E-01	0.00E+00	1.64E-05	3.78E-03	0.00E+00	-1.04E-01
ETP-fw <sup>1</sup>	[CTUe]	6.21E+01	2.57E-01	6.07E-01	6.30E+01	0.00E+00	4.16E-02	1.97E-01	0.00E+00	-3.54E+00
HTP-c <sup>1</sup>	[CTUh]	1.85E-09	5.26E-12	1.80E-11	1.87E-09	0.00E+00	8.51E-13	1.51E-11	0.00E+00	-5.17E-10
HTP-nc <sup>1</sup>	[CTUh]	5.56E-08	2.80E-10	8.79E-10	5.67E-08	0.00E+00	4.54E-11	5.14E-10	0.00E+00	-1.01E-08
SQP <sup>1</sup>	-	1.25E+01	1.51E-01	3.59E+00	1.63E+01	0.00E+00	2.45E-02	1.27E-01	0.00E+00	-5.40E+01
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)									
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. <sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.									

RESOURCE USE PER 1 kg Knudsen Kilen Sound Reducer, Regupol										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	-2.22E+01	2.63E-02	1.25E+00	-2.09E+01	0.00E+00	4.26E-03	2.56E+01	0.00E+00	-3.31E+01
PERM	[MJ]	2.55E+01	0.00E+00	2.84E-02	2.55E+01	0.00E+00	0.00E+00	-2.55E+01	0.00E+00	0.00E+00
PERT	[MJ]	3.30E+00	2.63E-02	1.28E+00	4.61E+00	0.00E+00	4.26E-03	1.10E-01	0.00E+00	-3.31E+01
PENRE	[MJ]	7.67E+01	3.63E-01	5.88E-01	7.76E+01	0.00E+00	5.87E-02	5.84E-01	0.00E+00	-1.08E+01
PENRM	[MJ]	0.00E+00	0.00E+00	2.10E+00	2.10E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	7.67E+01	3.63E-01	2.69E+00	7.97E+01	0.00E+00	5.87E-02	5.84E-01	0.00E+00	-1.08E+01
SM	[kg]	0.00E+00	0.00E+00	7.84E-02	7.84E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	4.78E-02	2.88E-05	7.58E-04	4.86E-02	0.00E+00	4.66E-06	5.11E-03	0.00E+00	-8.23E-03
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water									

WASTE CATEGORIES AND OUTPUT FLOWS PER 1 kg Knudsen Kilen Sound Reducer, Regupol										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	0.00E+00	1.12E-12	1.29E-08	1.29E-08	0.00E+00	1.82E-13	5.15E-11	0.00E+00	7.97E-09
NHWD	[kg]	0.00E+00	5.53E-05	2.20E-03	2.26E-03	0.00E+00	8.95E-06	1.11E-02	0.00E+00	-4.38E-02
RWD	[kg]	0.00E+00	6.79E-07	1.80E-04	1.80E-04	0.00E+00	1.10E-07	2.39E-05	0.00E+00	-9.11E-04
CRU	[kg]	0.00E+00								
MFR	[kg]	0.00E+00								
MER	[kg]	0.00E+00								
EE	[MJ]	0.00E+00	0.00E+00	1.16E+01	1.16E+01	0.00E+00	0.00E+00	2.27E+01	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy									

BIOGENIC CARBON CONTENT PER 1 kg Knudsen Kilen Sound Reducer, Regupol		
Parameter	Unit	At the factory gate
Biogenic carbon content in product	kg C	0.00E+0
Biogenic carbon content in accompanying packaging	kg C	5.37E-02
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

Product group 5 Sound Reducer Light, Regupol Resist

ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Sound Reducer Light, Regupol Resist										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
GWP-total	[kg CO <sub>2</sub> eq.]	4.14E-01	2.68E-02	1.17E-01	5.58E-01	0.00E+00	4.34E-03	2.21E+00	0.00E+00	-1.61E-02
GWP-fossil	[kg CO <sub>2</sub> eq.]	4.11E-01	2.65E-02	1.64E-01	6.02E-01	0.00E+00	4.29E-03	2.21E+00	0.00E+00	-1.58E-02
GWP-biogenic	[kg CO <sub>2</sub> eq.]	2.94E-03	7.84E-05	-4.72E-02	-4.41E-02	0.00E+00	1.27E-05	1.58E-04	0.00E+00	-2.26E-04
GWP-luluc	[kg CO <sub>2</sub> eq.]	9.43E-05	2.46E-04	1.53E-04	4.93E-04	0.00E+00	3.98E-05	3.53E-06	0.00E+00	-5.14E-06
ODP	[kg CFC 11 eq.]	7.69E-09	3.45E-15	9.87E-13	7.69E-09	0.00E+00	5.59E-16	1.78E-13	0.00E+00	-3.22E-13
AP	[mol H <sup>+</sup> eq.]	9.04E-04	3.96E-05	1.83E-04	1.13E-03	0.00E+00	6.40E-06	1.30E-03	0.00E+00	-5.52E-05
EP-freshwater	[kg P- eq.]	2.06E-05	9.71E-08	7.70E-07	2.15E-05	0.00E+00	1.57E-08	4.83E-08	0.00E+00	-2.42E-07
EP-marine	[kg N eq.]	2.04E-04	1.44E-05	7.57E-05	2.94E-04	0.00E+00	2.34E-06	6.30E-04	0.00E+00	-1.81E-05
EP-terrestrial	[mol N eq.]	2.14E-03	1.71E-04	7.79E-04	3.09E-03	0.00E+00	2.76E-05	7.25E-03	0.00E+00	-1.54E-04
POCP	[kg NMVOC eq.]	1.08E-03	3.47E-05	1.97E-04	1.31E-03	0.00E+00	5.62E-06	1.62E-03	0.00E+00	-4.06E-05
ADPm <sup>1</sup>	[kg Sb eq.]	8.95E-07	1.75E-09	1.07E-08	9.07E-07	0.00E+00	2.83E-10	1.70E-09	0.00E+00	-6.24E-09
ADPf <sup>1</sup>	[MJ]	6.12E+00	3.62E-01	2.47E+00	8.95E+00	0.00E+00	5.85E-02	5.83E-01	0.00E+00	-2.16E-01
WDP <sup>1</sup>	[m <sup>3</sup> ]	9.61E-02	3.21E-04	3.96E-03	1.00E-01	0.00E+00	5.19E-05	2.17E-01	0.00E+00	-2.83E-03
Caption	GWP-total = Global Warming Potential - total; GWP-fossil = Global Warming Potential - fossil fuels; GWP-biogenic = Global Warming Potential - biogenic; GWP-luluc = Global Warming Potential - land use and land use change; ODP = Ozone Depletion; AP = Acidification; EP-freshwater = Eutrophication – aquatic freshwater; EP-marine = Eutrophication – aquatic marine; EP-terrestrial = Eutrophication – terrestrial; POCP = Photochemical zone formation; ADPm = Abiotic Depletion Potential – minerals and metals; ADPf = Abiotic Depletion Potential – fossil fuels; WDP = water use									
Disclaimer	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.									

ADDITIONAL ENVIRONMENTAL IMPACTS PER 1 kg Knudsen Kilen Sound Reducer Light, Regupol Resist										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PM	[Disease incidence]	7.75E-09	3.28E-10	2.96E-09	1.10E-08	0.00E+00	5.30E-11	3.60E-09	0.00E+00	-4.08E-10
IRP <sup>2</sup>	[kBq U235 eq.]	1.16E-01	1.01E-04	2.06E-02	1.37E-01	0.00E+00	1.64E-05	3.78E-03	0.00E+00	-2.08E-03
ETP-fw <sup>1</sup>	[CTUe]	3.99E+00	2.57E-01	5.34E-01	4.78E+00	0.00E+00	4.16E-02	1.97E-01	0.00E+00	-7.09E-02
HTP-c <sup>1</sup>	[CTUh]	1.37E-10	5.26E-12	1.48E-11	1.57E-10	0.00E+00	8.51E-13	1.51E-11	0.00E+00	-1.03E-11
HTP-nc <sup>1</sup>	[CTUh]	5.39E-09	2.80E-10	7.04E-10	6.38E-09	0.00E+00	4.54E-11	5.14E-10	0.00E+00	-2.01E-10
SQP <sup>1</sup>	-	1.85E+00	1.51E-01	2.44E+00	4.45E+00	0.00E+00	2.45E-02	1.27E-01	0.00E+00	-1.08E+00
Caption	PM = Particulate Matter emissions; IRP = Ionizing radiation – human health; ETP-fw = Eco toxicity – freshwater; HTP-c = Human toxicity – cancer effects; HTP-nc = Human toxicity – non cancer effects; SQP = Soil Quality (dimensionless)									
Disclaimers	<sup>1</sup> The results of this environmental indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator. <sup>2</sup> This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.									

RESOURCE USE PER 1 kg Knudsen Kilen Sound Reducer Light, Regupol Resist										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
PERE	[MJ]	-2.29E+01	2.63E-02	9.03E-01	-2.20E+01	0.00E+00	4.26E-03	2.56E+01	0.00E+00	-6.63E-01
PERM	[MJ]	2.55E+01	0.00E+00	1.89E-02	2.55E+01	0.00E+00	0.00E+00	-2.55E+01	0.00E+00	0.00E+00
PERT	[MJ]	2.57E+00	2.63E-02	9.22E-01	3.52E+00	0.00E+00	4.26E-03	1.10E-01	0.00E+00	-6.63E-01
PENRE	[MJ]	6.12E+00	3.63E-01	1.08E+00	7.56E+00	0.00E+00	5.87E-02	5.84E-01	0.00E+00	-2.16E-01
PENRM	[MJ]	0.00E+00	0.00E+00	1.39E+00	1.39E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	[MJ]	6.12E+00	3.63E-01	2.47E+00	8.96E+00	0.00E+00	5.87E-02	5.84E-01	0.00E+00	-2.16E-01
SM	[kg]	9.80E-01	0.00E+00	5.20E-02	1.03E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	[MJ]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	[m³]	3.23E-03	2.88E-05	5.85E-04	3.84E-03	0.00E+00	4.66E-06	5.11E-03	0.00E+00	-1.65E-04
Caption	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non renewable primary energy excluding non renewable primary energy resources used as raw materials; PENRM = Use of non renewable primary energy resources used as raw materials; PENRT = Total use of non renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non renewable secondary fuels; FW = Net use of fresh water									

WASTE CATEGORIES AND OUTPUT FLOWS PER 1 kg Knudsen Kilen Sound Reducer Light, Regupol Resist										
Parameter	Unit	A1	A2	A3	A1-A3	C1	C2	C3	C4	D
HWD	[kg]	-2.40E-10	1.12E-12	8.59E-09	8.35E-09	0.00E+00	1.82E-13	5.15E-11	0.00E+00	1.59E-10
NHWD	[kg]	1.22E-01	5.53E-05	1.69E-03	1.24E-01	0.00E+00	8.95E-06	1.11E-02	0.00E+00	-8.76E-04
RWD	[kg]	6.64E-04	6.79E-07	1.74E-04	8.39E-04	0.00E+00	1.10E-07	2.39E-05	0.00E+00	-1.82E-05
CRU	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MFR	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MER	[kg]	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
EE	[MJ]	0.00E+00	0.00E+00	2.32E-01	2.32E-01	0.00E+00	0.00E+00	4.54E-01	0.00E+00	0.00E+00
Caption	HWD = Hazardous waste disposed; NHWD = Non hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EE = Exported energy									

BIOGENIC CARBON CONTENT PER 1 kg Knudsen Kilen Sound Reducer Light, Regupol Resist		
Parameter	Unit	At the factory gate
Biogenic carbon content in product	kg C	0.00E+0
Biogenic carbon content in accompanying packaging	kg C	3.56E-02
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO <sub>2</sub>	

## Additional information

### LCA interpretation

The results in accordance with DS/EN 15804+A2 of the five Knudsen Kilen Products show that the life cycle modules A1-A3 have the largest contribution to most of the 13 core environmental impact categories. For *Product group 1, Wedges, HDPE*, and *Product group 2, Height Adjustment Products, LDPE*, the life cycle modules A1-A3 have the largest contribution to 12 out of the 13 core environmental impact categories, whereas the life cycle modules C1-C4 have the largest contribution to only 1, which is ODP. For *Product group 3, Combi Sole*, and *Product group 4, Sound Reducer Regupol*, life cycle modules A1-A3 have the largest contribution to all the environmental impact categories. For *Product group 5, Sound Reducer Light of Regupol Resist*, the life cycle modules A1-A3 have the largest contribution to only 6 of the 13 core environmental impact categories and the life cycle modules C1-C4 have the largest contribution to the remaining 7 of the 13 core environmental impact categories.

For Product group 1, the results shows that HDPE granulate and also MB LDPE (Master Batch) are the most dominant processes for the total environmental impact in the different core environmental impact indicators for modules A1-A3. The process HDPE granulate has the largest contribution in 7 of the 13 core environmental impact categories. For Product group 2, the process Electricity from injection molding has the largest contribution in 6 of the 13 core environmental impact categories. For Product group 3, PS granulate has the largest contribution in 8 of the 13 core environmental impact categories. For Product group 4, Regupol has the largest contribution in 12 of the 13 core environmental impact categories, and for the remaining category, which is Climate change biogenic, it is the packaging of cardboard which is the largest contributor. For all of the five products, it is the the process of packaging, which is contributing the most to the impact category of Climate Change biogenic. For Product group 5, the production of Regupol resist, has the largest contribution in 7 of the 13 core environmental impact categories. The production of the Adhesive is dominant for the results.

Relative to Product group 1, Product group 3 and Product group 4, Product group 2 has a smaller impact in A1-A3, as the main input material is LDPE granulate produced from secondary plastic input. The same is apply for Product group 5, where the main material input, regupol resist, is produced from secondary material input.

The low impact for Product group 1, 2 and 3 compared to Product group 4 and 5 for module C1-C4 is due to high share of recycling at EoL compared to Product group 4 and 5 where 100% of the product is incinerated.

## Technical information on scenarios

### Reference service life

RSL information		Unit
Reference service Life – not applicable	-	Years

### End of life (C1-C4)

Scenario information	Value	Unit
Collected separately	1	kg
Collected with mixed waste	-	kg
For reuse	-	kg
For recycling	0 - 0.92	kg
For energy recovery	0.04 - 1	kg
For final disposal	0 – 0.04	kg
Assumptions for scenario development	-	As appropriate

### Re-use, recovery and recycling potential (D)

Scenario information/Materiel	Value	Unit
Displaced material	0 – 0.774	kg
Energy recovery from waste incineration	0.04 - 1	MJ

#### **Indoor air**

*The EPD does not give information on release of dangerous substances to indoor air because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A1 chapter 7.4.1.*

#### **Soil and water**

*The EPD does not give information on release of dangerous substances to soil and water because the horizontal standards on the relevant measurements are not available. Read more in EN15804+A1 chapter 7.4.2.*

## References

<p><b>Publisher</b></p>	<p>  <a href="http://www.epddanmark.dk">www.epddanmark.dk</a>  <small>Template version 2023.1</small></p>
<p><b>Programme operator</b></p>	<p>Danish Technological Institute          Buildings &amp; Environment          Gregersensvej          DK-2630 Taastrup  <a href="http://www.teknologisk.dk">www.teknologisk.dk</a></p>
<p><b>LCA-practitioner</b></p>	<p>Nana Lin Rasmussen          Morten Ryberg</p> <p>Sweco A/S          Ørestads Blvd. 41,          2300 København,          Denmark</p> <p><b>SWECO</b> </p>
<p><b>LCA software / background data</b></p>	<p><i>LCA for Experts (LCA FE)</i> version 10.7.</p> <p>Generic data are primarily based on life cycle inventory data from Spheras database Managed LCA Content (MLC) version 2023.1 and Ecoinvent database 3.8.</p>
<p><b>3<sup>rd</sup> party verifier</b></p>	<p>Guangli Du</p> <p>BUILD – Institut for Byggeri, By og Miljø,          Aalborg Universitet København</p>

### General programme instructions

General Programme Instructions, version 2.0, spring 2020  
www.epddanmark.dk

#### EN 15804

DS/EN 15804 + A2:2019 - "Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products"

#### EN 15942

DS/EN 15942:2011 – " Sustainability of construction works – Environmental product declarations – Communication format business-to-business"

#### ISO 14025

DS/EN ISO 14025:2010 – " Environmental labels and declarations – Type III environmental declarations – Principles and procedures"

#### ISO 14040

DS/EN ISO 14040:2008 – " Environmental management – Life cycle assessment – Principles and framework"

#### ISO 14044

DS/EN ISO 14044:2008 – " Environmental management – Life cycle assessment – Requirements and guidelines"

## 1 References

- Environment. (2021). Hentet fra <https://environment.ec.europa.eu/system/files/2021-12/Annexes%201%20to%202.pdf>
- EPD Danmark. (2020). *General programme instructions, version 2.0*.
- EPD Danmark. (April 2023). *Dokumenter til download - Konsulentkit ver. 2023.1*. Hentet fra EPD Danmark: <https://www.epddanmark.dk/dokumenter/>
- Hjørring Varmeforsyning. (2023). *Kraftvarmeværk*. Hentet fra Hjørring Varmeforsyning: <https://www.hjvarme.dk/teknik/kraftvarmevaerk/>
- Hofo. (2023). *Forskellige forbrændingsmetoder*. Hentet fra Hofo: <https://www.hofo.dk/privat/fjernvarme/bliv-klog-paa-fjernvarme/saadan-producerer-hofo-fjernvarme/forskellige-forbraendingsmetoder/>
- Lundgren, C.-E. (2009). *Kraftvarmeværk*. Hentet fra Den Store Danske: <https://denstoredanske.lex.dk/kraftvarmev%C3%A6rk>
- Mahakalkar, S., Sambare, R., & Sunheriya, N. (2019). *Effect of Environmental Conditions on Performance of Corrugated Sheet Boxes Manufacturing Process*. International Journal of Recent Technology and Engineering (IJRTE).
- Miljøministeriet Miljøstyrelsen. (2020). *Miljøministeriet Miljøstyrelsen*. Hentet fra Affaldsstatistikker: <https://mst.dk/affald-jord/affald/affaldsdatasystemet/find-affaldsdata/affaldsstatistikker/>
- Rambøll. (2023). *Avedøre: Beviset på at vedvarende energi kan være fleksibelt*. Hentet fra Rambøll: <https://www.ramboll.com/da-dk/projekter/energi/conversion-to-renewables-avedore-plant>
- Støvring Kraftvarmeværk. (2023). *Teknik og teknologi*. Hentet fra Støvring Kraftvarmeværk: <https://www.stoevring-varme.dk/profil/teknik-og-teknologi/>