



SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

12012-10-1048

TESCON NAIDECK mono


Product group: Sealing tapes



pro clima - MOLL bauökologische Produkte GmbH
Rheintalstraße 35-43
68723 Schwetzingen



Product qualities:

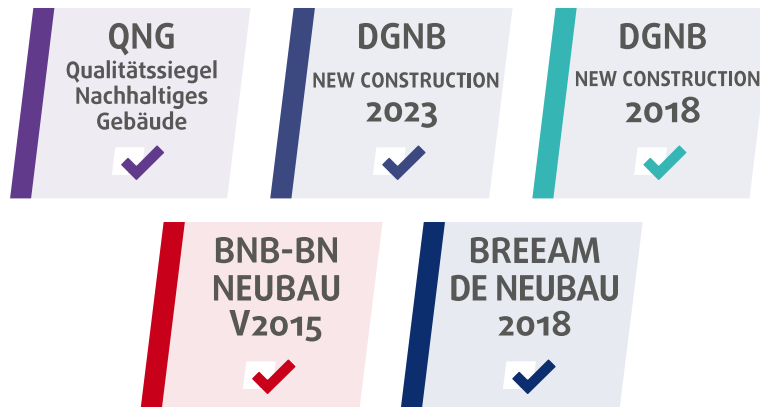

Köttner
Helmut Köttner
Scientific Director
Freiburg, 02 February 2026



Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



Contents

■ QNG - Qualitätssiegel Nachhaltiges Gebäude	1
■ DGNB New Construction 2023	2
■ DGNB New Construction 2018	3
■ BNB-BN Neubau V2015	4
■ BREEAM DE Neubau 2018	5
Product labels	6
Legal notices	7
Technical data sheet/attachments	8

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar





Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



QNG - Qualitätssiegel Nachhaltiges Gebäude

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien	not applicable	not applicable	QNG ready - Not relevant for assessment



Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



DGNB New Construction 2023

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	not applicable		Not relevant for assessment

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	not applicable		Not relevant for assessment



Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



DGNB New Construction 2018

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	not applicable	not applicable	Not relevant for assessment



Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



BNB-BN Neubau V2015

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt			Not relevant for assessment



Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality			Not relevant for assessment



Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.



Products bearing the Sentinel Holding Institute QNG-ready seal are suitable for projects aiming to achieve the "Qualitätssiegel Nachhaltiges Gebäude" (Quality Seal for Sustainable Buildings). QNG-ready products meet the requirements of QNG Appendix Document 3.1.3, "Avoidance of Harmful Substances in Building Materials." The KfW loan program Climate-Friendly New Construction with QNG may allow for additional funding.

Product:

TESCON NAIDECK mono

SHI Product Passport no.:

12012-10-1048



Legal notices

(*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.

Find our criteria here: <https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfverfahren/kriterien%20of%20Pr%C3%BCf%20Produkte>

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar



Publisher

Sentinel Holding Institut GmbH
Bötzing Str. 38
79111 Freiburg im Breisgau
Germany
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

TESCON NAIDECK mono

Einseitig klebendes Nageldichtband



Technische Daten

Stoff		
Träger	PE-Folie	
Kleber	Butylkautschuk mit Acrylat modifiziert	
Trennlage	silikonisierte PE-Folie	
Eigenschaft	Regelwerk	Wert
Farbe		Butylkautschuk: grau, Folie: schwarz
Dicke		1,1 mm
Freibewitterung		6 Monate, verbaut unter der Konterlatte
Verarbeitungstemperatur		-10 °C bis +35 °C
Temperaturbeständigkeit		dauerhaft -40 °C bis +80 °C
Lagerung		kühl und trocken
QNG Anforderungen	Anhangdokument 3.1.3	erfüllt

Anwendung

Einsatz unter der Konterlattung bei geeigneten Dachkonstruktionen. Geeignet für die Erstellung von Behelfsdeckungen im Sinne der Produktdatenblätter des ZVDH für Unterdeck- und Unterspannbahnen.

Lieferformen

Art.-Nr.	GTIN	Länge	Breite	Gewicht	VE	Gebinde
1AR02154	4026639221544	20 m	45 mm	1,65 kg	12	336

Vorteile

- ✓ Sehr gute Abdichtwirkung: Dichtmasse wird beim Nageln / Schrauben in das Loch gezogen
- ✓ Leichte Vormontage auf der Konterlatte möglich
- ✓ Regelwerkskonform: Entspricht den Anforderungen des ZVDH und der SIA 232/1
- ✓ Sicher während der Bauphase: Für Behelfsdeckungen (CH: Bauzeitabdichtung) geeignet

Untergründe

Vor dem Verkleben Untergründe reinigen. Auf überfrorenen Untergründen ist die Verklebung nicht möglich. Es dürfen keine abweisenden Stoffe auf den zu verklebenden Materialien vorhanden sein (z. B. Fette oder Silikone).

Untergründe müssen ausreichend trocken und tragfähig sein.

TESCON NAIDECK mono kann auf allen pro clima Außenbahnen, anderen Unterdeck-/Unterspannbahnen und Wandschalungsbahnen (z. B. aus PP und PET) sowie auf MDF- und Holzfasernerunterdeckplatten eingesetzt werden.

Beste Ergebnisse für die Sicherheit der Konstruktion werden auf ebenen, unstrukturierten Untergründen erreicht. Die Eignung des Untergrundes ist eigenverantwortlich zu prüfen, ggf. sind Testverklebungen empfehlenswert.

Bei nicht tragfähigen Untergründen ist eine Vorbehandlung mit dem TESCO PRIMER zu empfehlen.

Rahmenbedingungen

Perforationssichernde Maßnahmen und wasserführende Verklebungen können nur auf faltenfrei verlegten Unterdeck- bzw. Unterspannbahnen erreicht werden.

TESCON NAIDECK mono ohne Unterbrechung zwischen Konterlattung und Unterdeck- bzw. Unterspannbahn aufbringen. Dadurch ist gesichert, dass nach der Einteilung des Lattenabstandes die Nägel oder Schrauben der Traglattung auch abgedichtet sind.

Die Verklebung kann auf der Konterlatte oder auf dem zu dichtenden Untergrund erfolgen. Band fest anreiben.



Die dargestellten Sachverhalte beziehen sich auf den Stand der aktuellen Forschung und der praktischen Erfahrung. Wir behalten uns Änderungen der empfohlenen Konstruktionen und der Verarbeitung sowie die Weiterentwicklung und die damit verbundene Qualitätsänderung der einzelnen Produkte vor. Wir informieren Sie gern über den aktuellen technischen Kenntnisstand zum Zeitpunkt der Verlegung.

Weitere Informationen über die Verarbeitung und Konstruktionsdetails enthalten die pro clima Planungs- und Anwendungsempfehlungen. Bei Fragen erreichen Sie die technische Hotline unter pro clima unter 0 62 02 - 27 82.45.

MOLL

bauökologische Produkte GmbH
Rheintalstraße 35 - 43
D-68723 Schwetzingen
Fon: +49 (0) 62 02 - 27 82.0
eMail: info@proclima.de

