



SHI-PRODUKTPASS

Produkte finden - Gebäude zertifizieren

SHI-Produktpass-Nr.:

15188-10-1000

RECAtherm microfine Kautschukisolierung

Warengruppe: Isolierung



RECA NORM GmbH
Am Wasserturm 4
74635 Kupferzell



Produktqualitäten:



Köttner

Helmut Köttner
Wissenschaftlicher Leiter
Freiburg, den 27.08.2025



Produkt:

RECAtherm microfine Kautschukisolierung

SHI Produktpass-Nr.:

15188-10-1000



Inhalt

■ SHI-Produktbewertung 2024	1
■ Qualitätssiegel Nachhaltiges Gebäude	2
■ EU-Taxonomie	3
■ DGNB Neubau 2023	4
■ DGNB Neubau 2018	5
■ BREEAM DE Neubau 2018	6
Produktsiegel	7
Rechtliche Hinweise	8
Technisches Datenblatt/Anhänge	9

Wir sind stolz darauf, dass die SHI-Datenbank, die erste und einzige Datenbank für Bauprodukte ist, die ihre umfassenden Prozesse sowie die Aktualität regelmäßig von dem unabhängigen Prüfunternehmen SGS-TÜV Saar überprüfen lässt.





Produkt:

**RECAtherm microfine
Kautschukisolierung**

SHI Produktpass-Nr.:

15188-10-1000



SHI-Produktbewertung 2024

Seit 2008 etabliert die Sentinel Holding Institut GmbH (SHI) einen einzigartigen Standard für schadstoffgeprüfte Produkte. Experten führen unabhängige Produktprüfungen nach klaren und transparenten Kriterien durch. Zusätzlich überprüft das unabhängige Prüfunternehmen SGS regelmäßig die Prozesse und Aktualität.

Kriterium	Produktkategorie	Schadstoffgrenzwert	Bewertung
SHI-Produktbewertung	sonstige Produkte	TVOC $\leq 300 \mu\text{g}/\text{m}^3$ Formaldehyd $\leq 24 \mu\text{g}/\text{m}^3$	Schadstoffgeprüft
Gültig bis: 15.08.2026			



Produkt:

**RECAtherm microfine
Kautschukisolierung**

SHI Produktpass-Nr.:

15188-10-1000



Qualitätssiegel Nachhaltiges Gebäude

Das Qualitätssiegel Nachhaltiges Gebäude, entwickelt durch das Bundesministerium für Wohnen, Stadtentwicklung und Bauwesen (BMWSB), legt Anforderungen an die ökologische, soziokulturelle und ökonomische Qualität von Gebäuden fest. Das Sentinel Holding Institut prüft Bauprodukte gemäß den QNG-Anforderungen für eine Zertifizierung und vergibt das QNG-ready Siegel. Das Einhalten des QNG-Standards ist Voraussetzung für den KfW-Förderkredit. Für bestimmte Produktgruppen hat das QNG derzeit keine spezifischen Anforderungen definiert. Diese Produkte sind als nicht bewertungsrelevant eingestuft, können jedoch in QNG-Projekten genutzt werden.

Kriterium	Pos. / Bauproduktgruppe	Betrachtete Stoffe	QNG Freigabe
3.1.3 Schadstoffvermeidung in Baumaterialien	12.2 Flexible Kunstschaum- Dämmstoffe für die Haustechnik	Halogenierte Treibmittel / Chlorparaffine / Polybromierte Biphenyle (PBB) / Polybromierte Diphenylether (PBDE)	QNG-ready
Nachweis: Herstellererklärung vom 18.09.2024			



Produkt:

**RECAtherm microfine
Kautschukisolierung**

SHI Produktpass-Nr.:

15188-10-1000



EU-Taxonomie

Die EU-Taxonomie klassifiziert wirtschaftliche Aktivitäten und Produkte nach ihren Umweltauswirkungen. Auf der Produktebene gibt es gemäß der EU-Verordnung klare Anforderungen zu Formaldehyd und flüchtigen organischen Verbindungen (VOC). Die Sentinel Holding Institut GmbH kennzeichnet qualifizierte Produkte, die diesen Standard erfüllen.

Kriterium	Produkttyp	Betrachtete Stoffe	Bewertung
DNSH - Vermeidung und Verminderung der Umweltverschmutzung		Stoffe nach Anlage C	EU-Taxonomie konform
Nachweis: Herstellererklärung vom 18.09.2024			



Produkt:

RECAtherm microfine Kautschukisolierung

SHI Produktpass-Nr.:

15188-10-1000



DGNB Neubau 2023

Das DGNB-System (Deutsche Gesellschaft für Nachhaltiges Bauen) bewertet die Nachhaltigkeit von Gebäuden verschiedener Art. Das System ist sowohl anwendbar für private und gewerbliche Großprojekte als auch für kleinere Wohngebäude. Die Version 2023 setzt hohe Standards für ökologische, ökonomische, soziokulturelle und funktionale Aspekte während des gesamten Lebenszyklus eines Gebäudes.

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 03.05.2024 (3. Auflage)	43 Flammhemmend ausgerüstete Bauprodukte (Erzeugnisse)	a) Chlorparaffine (vgl. Definition), Polybromierte Biphenyle (PBB) und Diphenylether (PBDE) und SVHC; b) Antimontrioxid	Qualitätsstufe: 3
Nachweis: Herstellererklärung vom 18.09.2024			

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt, 29.05.2025 (4. Auflage)	43b Flammhemmend ausgerüstete Bauprodukte	Chlorparaffine (vgl. Definition), Polybromierte Biphenyle (PBB), Diphenylether (PBDE), Antimontrioxid und SVHC	Qualitätsstufe: 3
Nachweis: Herstellererklärung vom 18.09.2024			



Produkt:

RECAtherm microfine Kautschukisolierung

SHI Produktpass-Nr.:

15188-10-1000



DGNB Neubau 2018

Das DGNB-System (Deutsche Gesellschaft für Nachhaltiges Bauen) bewertet die Nachhaltigkeit von Gebäuden verschiedener Art. Das System ist sowohl anwendbar für private und gewerbliche Großprojekte als auch für kleinere Wohngebäude.

Kriterium	Pos. / Relevante Bauteile / Bau-Materialien / Flächen	Betrachtete Stoffe / Aspekte	Qualitätsstufe
ENV 1.2 Risiken für die lokale Umwelt	43 Flammhemmend ausgerüstete Bauprodukte (Erzeugnisse)	Chlorparaffine (vgl. Definition), Polybromierte Biphenyle (PBB) und Diphenylether (PBDE) und SVHC	Qualitätsstufe: 3
Nachweis: Herstellererklärung vom 18.09.2024			



Produkt:

RECAtherm microfine Kautschukisolierung

SHI Produktpass-Nr.:

15188-10-1000



BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) ist ein britisches Gebäudebewertungssystem, welches die Nachhaltigkeit von Neubauten, Sanierungsprojekten und Umbauten einstuft. Das Bewertungssystem wurde vom Building Research Establishment (BRE) entwickelt und zielt darauf ab, ökologische, ökonomische und soziale Auswirkungen von Gebäuden zu bewerten und zu verbessern.

Kriterium	Produktkategorie	Betrachtete Stoffe	Qualitätsstufe
Hea 02 Qualität der Innenraumluft			nicht bewertungsrelevant



Produkt:

RECAtherm microfine Kautschukisolierung

SHI Produktpass-Nr.:

15188-10-1000



Produktsiegel

In der Baubranche spielt die Auswahl qualitativ hochwertiger Materialien eine zentrale Rolle für die Gesundheit in Gebäuden und deren Nachhaltigkeit. Produktlabels und Zertifikate bieten Orientierung, um diesen Anforderungen gerecht zu werden. Allerdings besitzt jedes Zertifikat und Label eigene Prüfkriterien, die genau betrachtet werden sollten, um sicherzustellen, dass sie den spezifischen Bedürfnissen eines Bauvorhabens entsprechen.



Dieses Produkt ist schadstoffgeprüft und wird vom Sentinel Holding Institut empfohlen. Gesundes Bauen, Modernisieren und Betreiben von Immobilien erfolgt dank des Sentinel Holding Konzepts nach transparenten und nachvollziehbaren Kriterien.



Produkte mit dem QNG-ready Siegel des Sentinel Holding Instituts eignen sich für Projekte, für welche das Qualitätssiegel Nachhaltiges Gebäude (QNG) angestrebt wird. QNG-ready Produkte erfüllen die Anforderungen des QNG Anhangdokument 3.1.3 "Schadstoffvermeidung in Baumaterialien". Das KfW-Kreditprogramm Klimafreundlicher Neubau mit QNG kann eine höhere Fördersumme ermöglichen.



Produkt:

**RECAtherm microfine
Kautschukisolierung**

SHI Produktpass-Nr.:

15188-10-1000



Rechtliche Hinweise

(*) Die Kriterien dieses Steckbriefs beziehen sich auf das gesamte Bauobjekt. Die Bewertung erfolgt auf der Ebene des Gebäudes. Im Rahmen einer sachgemäßen Planung und fachgerechten Installation können einzelne Produkte einen positiven Beitrag zum Gesamtergebnis der Bewertung leisten. Das Sentinel Holding Institut stützt sich einzig auf die Angaben des Herstellers.

Alle Kriterien finden Sie unter:

<https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfverfahren/kriterien%20f%C3%BCr%20Produkte>

Wir sind stolz darauf, dass die SHI-Datenbank, die erste und einzige Datenbank für Bauprodukte ist, die ihre umfassenden Prozesse sowie die Aktualität regelmäßig von dem unabhängigen Prüfunternehmen SGS-TÜV Saar überprüfen lässt.



Herausgeber

Sentinel Holding Institut GmbH
Bötzingen Str. 38
79111 Freiburg im Breisgau
Tel.: +49 761 59048170
info@sentinel-holding.eu
www.sentinel-holding.eu

DOKUMENTATION

Technische Daten für recatherm microfine

Artikelnummer 0878 3., Graues Kautschukmaterial für die Heizungs- und Sanitärinstallation

Materialart		Schaumstoff auf Basis synthetischen Kautschuks, FEF (Flexible Elastomeric Foam)	
Zellstruktur		Geschlossenzellig	
Farbe		Grau	
Obere Temperaturgrenze	Rohr Ebene Fläche	+110 °C +85 °C	
Untere Temperaturgrenze		Wie bei Heizungs- & Sanitäranlagen üblich	
Wärmeleitfähigkeit	λ_{ϑ} bei +30 °C bei +40 °C bei +50 °C λ_{ϑ} bei +30 °C bei +40 °C bei +50 °C λ_{ϑ} bei +30 °C bei +40 °C bei +50 °C	$0,033 + 7,2 \cdot 10^{-6} \vartheta + 1,2 \cdot 10^{-6} \vartheta^2$ $\leq 0,036 \text{ W/(m·K)}$ $\leq 0,037 \text{ W/(m·K)}$ $\leq 0,038 \text{ W/(m·K)}$ $0,036 + 7,2 \cdot 10^{-6} \vartheta + 1,2 \cdot 10^{-6} \vartheta^2$ $\leq 0,039 \text{ W/(m·K)}$ $\leq 0,040 \text{ W/(m·K)}$ $\leq 0,041 \text{ W/(m·K)}$ $0,038 + 7,2 \cdot 10^{-6} \vartheta + 1,2 \cdot 10^{-6} \vartheta^2$ $\leq 0,041 \text{ W/(m·K)}$ $\leq 0,042 \text{ W/(m·K)}$ $\leq 0,043 \text{ W/(m·K)}$	Prüfung nach DIN EN ISO 8497 DIN EN 12667
Baustoffklasse(n) °	Schläuche Selbstklebendes Band	B ₁ -s3, d0 bis C ₁ -s3, d0 B-s3, d0	Prüfung nach DIN EN 13501-1
Feuerwiderstandsklasse gemäß DIN 4102-11		R 90	(ABP) Nr.: P-MPA-E-14-001
Korrosionsbeständigkeit		entspricht den Anforderungen – FMPA Stuttgart	Gemäß DIN 1988
Gesundheitliche Aspekte		Frei von Staub und Fasern Frei von Schwermetallen (z.B. Cadmium, Blei) und Formaldehyd	
Umweltaspekte		ODP Zero GWP Zero CFC & H-CFC-frei	
Andere Eigenschaften		CE-konform	
Lagerung	Selbstklebende Produkte	1 Jahr	Lagerung in trockenen, sauberen Räumen bei normaler Luftfeuchte (50 % bis 70 %) und Raumtemperatur (0 °C bis + 35 °C)
Toleranzen & Grenzabmaße		Gemäß DIN EN 14304:2013-04	
Anwendung im Außenbereich		Schutz gegen UV-Strahlung muss aufgebracht werden.	siehe Hinweis (1)

Stand 5. August 2020 – Abt.P - rk

To our valued customers

Dr. Jürgen Georg Weidinger
Chief Technology Innovation Officer

Tel.: +49 5257 9850-0
Fax: +49 5257 9850-590
E-Mail: juergengeorg.weidinger@kaimann.de
Internet: www.kaimann.de

REACH Declaration of Conformity

European ordinance 1907/2006 (REACH) has been in place since 2007 and applies to all business located in the EU. Together with the GHS / CLP ordinance (1272/2008) it regulates the determination of data, the classification and identification and the forwarding of data relating to chemicals. As a user of chemicals and manufacturer of products, we have considered all the implications of REACH and its requirements:

- 1) As a so-called "downstream user", we are not obliged to register according to title II of the ordinance. Our products are neither chemicals nor mixtures (acc. to art. 3) and comply with all the requirements of the REACH ordinance and are continuously tested and evaluated in relation to compliance with all legal premises. Proper (intended) use of our materials will not lead to release of respective chemicals (see 2). This again liberates us from any registration and edition of safety data sheet under title II of the ordinance for our insulation materials.
- 2) Under REACH our products are considered as commodities that are defined by their outer form. Being manufacturer of products, we are affected by the requirements of Article 33 to determine Substances of Very High Concern (SVHC) according to annex XIV and XVII of European ordinance 1907/2006 and to notify our customers of these. We are regularly checking the publications of the European health board (ECHA); according to the latest edition

October 2016 / last amendment to SVHC candidate list July 2024

no SVHC are contained in our products.

Additionally, our products do not contain other substances considered as hazardous to our present knowledge as defined in EC 850/2004, EU 519/2012, EU 253/2011, 67/548 ECC and EU 65/2011 (RoHS).

The company Kaimann GmbH therefore herewith declares that the products KAIFLEX KKplus(s1,s2,s3), KAIFLEX KK(s3), KAIFLEX EPDM(plus), KAIFLEX SOLAR EPDM, KAIFLEX HTplus(s2), KAIFLEX SHplus, KAIFLEX HF(plus,s2), KAIFLEX EF, KAIFLEX EF-E, KAIFLEX ST(plus,s2), KAIFLEX LS, KAIFLEX R-Force, KAIFLEX PE, KAIFLEX railPROTECT / railLSLT / railCLAD as well as the auxiliary materials KAIFLEX/KAIFIX supports, KAIFLEX tape, PROTECT, INCERAM and comCLAD claddings, KAIFINISH products and KAIFLEX Pyrostar together with adhesives Kaiflex 414, 415plus, 494 HHF, 505 and EPDM are complying to the requirements of EU ordinance 1907/2006 (REACH).

Kaimann GmbH



Dr. Jürgen Weidinger
CTIO

HERSTELLERERKLÄRUNG

Produktbezeichnung:	RECAtherm microfine Kautschukisolierung
Produktnummer:	0878 7xx
Anwendung/Beschreibung	Ein Schaumstoff auf der Basis synthetischen Kautschuks mit einer mikrofeinen Zellstruktur, der alle Anforderungen des GEG 2020 erfüllt. Eine hochflexible Isolierung mit geschlossener, mikrofeiner Zellstruktur für die Heizung-/Sanitärinstallation.

TVOC-Emission: Die TVOC-Emission des Produkts nach 28 Tagen in mg/m^3 beträgt: $<0,005 \text{ mg}/\text{m}^3$

CMR Kategorie 1A und 1B: Die Kat. 1A und 1B krebserregende Emission des Produktes nach 28 Tagen in mg/m^3 beträgt: $<0,001 \text{ mg}/\text{m}^3$

Chlorierte Paraffine: Es werden keine kurz- (SCCP) oder mittelkettigen Chlorparaffine verwendet. Langkettige Chlorparaffine (LCCP) werden in einer Konzentration von $> 0,1\%$ als Flammschutzmittel verwendet.

Anforderungen	Erfüllt
Frei von halogenierten Treibmitteln	Ja
Frei von Chlorparaffine (SCCP, MCCP)	Ja
Frei von Altreifengranulat	Ja
HBCD ($\leq 0,1 \text{ Gew.}\%$)	Ja
SVHC ($\leq 0,1 \text{ Gew.}\%$)	Ja
CMR-Stoffe der Kategorie 1A und 1B $< 0,1\%$	Ja
Blei- und Zinnkonzentration ($\leq 0,1 \text{ Gew.}\%$)	Ja
PBB & PBDE & TCEP ($\leq 0,1 \text{ Gew.}\%$)	Ja
REACH-konform	Ja

Datum: 18.09.2024

Seite 1 von 1

RECA NORM GmbH

Am Wasserturm 4

74635 Kupferzell

Telefon 07944 61-0

info@recanorm.de

www.recanorm.de

Sitz Kupferzell

Amtsgericht Stuttgart HRB 738108

USt-IdNr. DE146280166

Geschäftsführer

Thomas Häusele

Stefan John

Alexander Retzbach

ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A1


Owner of the Declaration	Kaimann GmbH
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-KAI-20200235-IBC1-EN
Issue date	17.12.2020
Valid to	16.12.2025

Kaiflex HTplus, Kaiflex HT s2
Kaimann GmbH

www.ibu-epd.com | <https://epd-online.com>



1. General Information

Kaimann GmbH Programme holder IBU – Institut Bauen und Umwelt e.V. Panoramastr. 1 10178 Berlin Germany	Kaiflex HTplus, Kaiflex HT s2 Owner of the declaration Kaimann GmbH Hansastraße 2-5 33161 Hövelhof
Declaration number EPD-KAI-20200235-IBC1-EN	Declared product / declared unit 1 m3 insulation material Kaiflex HTplus, Kaiflex HT s2
This declaration is based on the product category rules: Insulating materials made of foam plastics, 06.2017 (PCR checked and approved by the SVR)	Scope: Product line Kaiflex HTplus, Kaiflex HT s2 Thermal insulation material made of flexible elastomeric foam for technical building equipment and industrial installations. The EPD is performed in agreement with the demands of PCR Part A with reference to <i>EN 15804+A1:2013</i> and <i>PCR Part B</i> : Requirements on the EPD for insulating materials made of foam plastics. The EPD is based on the average Kaiflex HTplus, Kaiflex HT s2 production from one plant in Germany.
Issue date 17.12.2020	The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences. The EPD was created according to the specifications of <i>EN 15804+A1</i> . In the following, the standard will be simplified as <i>EN 15804</i> .
Valid to 16.12.2025	Verification The standard <i>EN 15804</i> serves as the core PCR Independent verification of the declaration and data according to <i>ISO 14025:2010</i> ☐ internally ☒ externally
 Dipl. Ing. Hans Peters (chairman of Institut Bauen und Umwelt e.V.)	 Matthias Klingler (Independent verifier)
 Dr. Alexander Röder (Managing Director Institut Bauen und Umwelt e.V.)	

2. Product

2.1 Information about the enterprise

Kaimann is a manufacturer of elastomeric insulation materials for technical pipe insulation in building technology and industry.

2.2 Product description/Product definition

Kaiflex HTPLUS, Kaiflex HT s2 is a flexible closed cell rubber insulation that prevents condensation and reduces energy loss. By incorporating a water vapour barrier into the insulation cell structure Kaiflex HTPLUS, Kaiflex HT s2 can effectively eliminate water vapour migration and retain its performance over the entire system life. It is available in tubes with thicknesses from 10 to 57.5 mm.

For the placing on the market of the product in the European Union/European Free Trade Association (EU/EFTA) (with the exception of Switzerland) *Regulation (EU) No. 305/2011 (CPR)* applies. The product needs a declaration of

performance taking into consideration *EN 14304* Thermal insulation products for building equipment and industrial installations - Factory made flexible elastomeric foam (FEF) products - Specification, and the CE-marking. For the application and use the respective national provisions apply.

2.3 Application

In addition to preventing condensation and saving energy, Kaiflex HTplus, Kaiflex HT s2 also performs an acoustic function, absorbing sound and dampening duct wall vibration. It has inherent anti-microbial resistance as standard and a BL-s3, d0 fire rating.

2.4 Technical Data

Constructional data

Name	Value	Unit
Gross density	45	kg/m ³

Water vapour diffusion resistance factor acc. to EN 12088	$\mu \geq 2000$	-
Thermal conductivity	$\lambda_9 = 0.032 + 7.2 \cdot 10^{-5} \vartheta + 1.2 \cdot 10^{-6} \vartheta^2$	W/(mK)
Thermal conductivity at 30 °C	0.035	W/(mK)
Thermal conductivity at 40 °C	0.036	W/(mK)
Thermal conductivity at 50 °C	0.037	W/(mK)

Performance data of the product in accordance with the declaration of performance with respect to its essential characteristics according to *EN 14304* Thermal insulation products for building equipment and industrial installations - Factory made flexible elastomeric foam (FEF) products - Specification.

2.5 Delivery status

The EPD is declared as a specific product of one plant of one manufacturer. This is in accordance with the classification rules for group 1a) from *PCR Part A* paragraph 5.2. The tubes are available in thicknesses between 13 to 19 mm and outer diameters of 48 to 80 mm.

2.6 Base materials/Ancillary materials

Kaiflex HTplus, Kaiflex HT s2 is based on synthetic rubber and consists of several components. The following table shows the components of her insulating foam clustered into substance groups:

- Rubber and polymers: 31%
- Fillers and pigments: 15%
- Blowing agent: 15%
- Vulcanisation system, additives, plasticizer: 3%
- Flame retardant: 35.5%
- Stabilizer: 0.5%

Rubber and polymer are the base material. Fillers and pigments are for firmness and colour. The blowing agent causes the volume increase and expansion process during the manufacture of the product. The vulcanisation system, additives, and plasticizer sure flexibility and workability. The flame retardants ensure the fire resistance of the end-product, and the adhesives and stabilizers are for processing and process control.

1) This product/article/at least one partial article contains substances listed in *SVHC 2019* candidate list (16.01.2020) exceeding 0.1 percentage by mass: **yes**. It contains 15% Azodicarbonamide (CAS number: 123-77-3).

2) This product/article/at least one partial article contains other carcinogenic, mutagenic, reprotoxic (CMR) substances in categories 1A or 1B which are not on *SVHC 2019* candidate list, exceeding 0.1 percentage by mass: **no**.

3) Biocide products were added to this construction product or it has been treated with biocide products (this then concerns a treated product as defined by the (EU) *Ordinance on Biocide Products*: **no**.

2.7 Manufacture

Manufacturing happens in a single plant in Germany. Upon delivery, the raw materials are either stored in a warehouse or used in the production shortly after. The

first step in the production of Kaiflex HTplus, Kaiflex HT s2 is to mix the raw materials in a kneader and to roll-out the resulting mixture which is then cut into sheets. The flat sheets are passed through an industrial cooler and cooled-off. The cooled-off sheets are granulated and the granulates are temporarily stored at room temperature before entering the compounding plant.

In the next step, the different types of granulates enter the compounding plant for mixing. The resulting elastomer compound is pushed through one of five extruders and carried on a conveyer belt through an industrial furnace for foaming. After foaming, the endless sheets are passed through an industrial cooler upon which a continuous longitudinal cut is applied to cut sheets into the right width. If applicable, the adhesive coating is applied on one side of the sheets. Finally, a traverse cut trims the continuous sheet into sheets of various sizes.

2.8 Environment and health during manufacturing

The manufacturer of the product complies with national manufacturing guidelines and regulations. KAIMANN's environmental management system is certified in accordance with *ISO 9001/14001/50001*.

2.9 Product processing/Installation

The installation of Kaiflex HTplus, Kaiflex HT s2 requires basic tools such as cutters and scissors. No additional specific protection, beyond normal protective clothes, is required. Liquid oxygen can react explosively in conjunction with organic material such as Kaiflex HTplus, Kaiflex HT s2 insulation material. To avoid the diffusion of oxygen, a complete seal must be affected. Butt joints and overlapping areas must also be made airtight using Kaiflex adhesive.

2.10 Packaging

Kaiflex HTplus, Kaiflex HT s2 is packaged in cardboard boxes, polyethene film, and polypropylene bags, both in varying sizes. Cardboard boxes and polypropylene bags are placed on wooden EURO pallets.

2.11 Condition of use

Changes in materials composition of the product during the use-phase only occur in case of extraordinary effects.

2.12 Environment and health during use

An odour should be considered normal. The odour will dissipate during use (about 4 weeks) because the cells are exchanged with the air.

2.13 Reference service life

Since the use stage (B1-B7) is not fully declared, the declaration of the reference service life is only voluntary.

2.14 Extraordinary effects

Fire

Fire protection

Name	Value
Building material class	EL
Burning droplets	d0

Smoke gas development	-
-----------------------	---

These properties were tested according to *EN 13501*.

Water

Formed from thousands of independently water-resistant cells, Kaiflex insulation is naturally resistant to moisture ingress and requires no additional water vapour barrier.

Mechanical destruction

Kaiflex insulation materials are flexible foams and display limited mechanical rigidity. If the material should be subjected to mechanical loads, it should be protected accordingly.

2.15 Re-use phase

At the end-of-life, the product can be used for energy recovery in a waste incineration plant, as well as the plastic from packaging. The cardboard and wooden pallets from packaging can be recycled.

2.16 Disposal

The product is disposed of in accordance with local regulations governed by the *European Waste Catalogue* (waste code: 07 wastes from organic chemical processes - 07 02 13 waste plastic).

2.17 Further information

Additional information about the product is available on <https://kaimann.com/>.

3. LCA: Calculation rules

3.1 Declared Unit

The declared unit is 1 m³ of the thermal insulation material for technical building equipment and industrial installations Kaiflex HTplus, Kaiflex HT s2 including packaging materials. The declared unit refers to the product as it leaves the factory gate. The gross density is the average density of all declared products, weighted by production volume.

Declared unit

Name	Value	Unit
Gross density	45	kg/m ³
Conversion factor to 1 kg (in kg/m ³)	45	-
Declared unit	1	m ³

3.2 System boundary

The type of EPD is cradle to gate with options. The system boundaries of the EPD follow the modular structure of *EN 15804* (according to *EN 15804*, section 6.2.1). Only the declaration of the product stage modules A1 to A3 is mandatory for compliance with *EN 15804*. The declaration of the modules of other life cycle stages is optional. Resources from the ecosphere and technosphere enter the system on stage A1 and leave the system on stage C4. The following life cycle stages are considered:

Module A1: The system boundaries comprise raw material extraction and supply from cradle to factory gate and is represented through generic background data sets.

Module A2: The transport of the raw materials from the factory gate to the point of manufacturing is represented through generic background data sets. The transportation distances have been provided by the manufacturer.

Module A3: The manufacturing includes manufacturer-specific material and energy data which are represented through generic data sets. Machinery as well as buildings to manufacture the declared unit are neglected. On average, 0.49 kWh electricity and 2.65 kWh natural gas are required for the manufacturing of 1m³ Kaiflex HTplus, Kaiflex HT s2. This data was provided by Kaimann GmbH. This module also includes packaging with plastics and cardboard and wooden pallets. The biogenic carbon stored is declared in the result section.

Module A4: The transport of Kaiflex HTplus, Kaiflex HT s2 from the factory gate to the site of assembly is represented through generic background data. The transportation distances are based on average transportation data provided by the manufacturer.

Module A5: The assembly can be done manually without the use of any electrical equipment. Packaging material from module A3 is disposed of here: Plastic packaging is incinerated, and cardboard and the wooden pallet are re-used.

Modules B1-B7: No resource use and impacts occur during the use phase of the products.

Modules C1&C3: Dismantling of Kaiflex HTplus, Kaiflex HT s2 is done manually without using any electrical equipment. No processing is required before disposal. Therefore, module C1 and C3 are disregarded.

Module C2: The products to be disposed of are transported to the waste treatment facility.

Module C4: The waste is treated according to the waste framework directive of the European Union.

Module D: Potential impacts and benefits from energy recovery and recycling are described.

3.3 Estimates and assumptions

Module A2: Raw materials are transported to the manufacturer by road transport and shipping. Information on the transportation distances was provided by the manufacturer. For the calculation, the distances were weighted by the mass of the respective raw materials.

Module A3: No production waste is assumed during the production of Kaiflex.

Module A4: Kaiflex HTplus, Kaiflex HT s2 is distributed in Europe. The average transportation distance per declared unit was calculated based on the sales volume and average transportation distance per country where Kaiflex HTplus, Kaiflex HT s2 is distributed. Based on the sum product of sales volume multiplied with road transportation, the total transportation distances were calculated and divided by the total sales volume to calculate the average transportation distance per declared unit. As a result,

the average road transportation distance per declared unit is 429 km. No loss during transportation is assumed.

Module A5: Kaiflex HTplus, Kaiflex HT s2 is assembled by manual labour using adhesives. It is assumed that no further energy or materials are required in this module and that consumers of Kaiflex HTplus, Kaiflex HT s2 order correct product sizes and thus avoid waste production during the assembly. The packaging materials are disposed of by re-using (cardboard and wooden pallet) and by incineration (polyethene and polypropylene).

Module C2: The average distance of the disassembled product to the point of disposal is assumed to be 75 kilometres covered by road.

Module C4: The product is incinerated.

3.4 Cut-off criteria

All material flows in module A1 are covered and almost all material and energy flows in module A3 are covered. Neglected material or energy flows have a mass or energy contribution of less than one per cent per process and contribute to less than five per cent of mass and energy flows of a module. Infrastructure such as office buildings and the manufacturing hall as well as the machinery required to produce the product have not been considered.

3.5 Background data

The LCA model underlying this EPD was created in *openLCA 1.10* developed by GreenDelta GmbH. The underlying reference database was ecoinvent 3.4 (2017), edited by EuGeos into the EuGeos 15804-IA 3.0 database.

3.6 Data quality

The life cycle inventory for the assessed product is based on an internal assessment of manufacturing and environmental data, assessment of LCA-relevant data for the supply chain and energy measurement within the factors. The required product flows for creation of the product system were handed over to GreenDelta GmbH.

All data was scrutinised and found to be plausible and consistent and were therefore found to be representative.

Some of the background data sets are more than 10 years old but were used when no recent dataset was available. Datasets from the ecoinvent database are assumed to have a high quality.

There are no materials or processes that are left out because they are under the cut-off threshold.

3.7 Period under review

The production data refers to the average of the year 2018.

3.8 Allocation

No allocation is carried out.

3.9 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to *EN 15804* and the building context, respectively the product-specific characteristics of performance, are taken into account.

The LCA model underlying this EPD was created in *openLCA 1.10* developed by GreenDelta GmbH. The underlying reference database was ecoinvent 3.4 (2017), edited by EuGeos into the *EuGeos 15804-IA 3.0* database.

4. LCA: Scenarios and additional technical information

The following technical scenario information serves as a basis for the declared modules. All values refer to the declared unit of 1 m³.

Transport to the building site (A4)

Name	Value	Unit
Transport distance (road)	429	km

Installation into the building (A5)

Name	Value	Unit
Auxiliary	1.6	kg
Water consumption	0	m ³
Other resources	0	kg
Electricity consumption	0	kWh
Other energy carriers	0	MJ
Material loss	0	kg
Output substances following waste treatment on site	16.5	kg
Dust in the air	0	kg
VOC in the air	0	kg

The 16.5 kg is the sum of all packaging materials per declared unit.

End of life (C1-C4)

Name	Value	Unit
Collected separately	45	kg
Collected as mixed construction waste	0	kg

Reuse	0	kg
Recycling	0	kg
Energy recovery	45	kg
Landfilling	0	kg
	-	

45 kg Kaiflex is incinerated for energy recovery.

Reuse, recovery and/or recycling potentials (D), relevant scenario information

Module D includes the credits of the incineration processes from modules C4 and A5 (packaging waste) at a waste incineration plant with an assumed efficiency of $R1 < 0.6$.

5. LCA: Results

The life cycle impact assessment method is based on *EN15804*. Energy indicators for resource use utilise the lower calorific value.

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED; MNR = MODULE NOT RELEVANT)

PRODUCT STAGE			CONSTRUCTION PROCESS STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MNR	MNR	MNR	MND	MND	MND	X	MND	X	X

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A1: 1 m³ Kaiflex HTplus, Kaiflex HT s2

Parameter	Unit	A1	A2	A3	A4	A5	C2	C4	D
GWP	[kg CO ₂ -Eq.]	1.91E+2	5.61E+0	1.49E+1	3.12E+0	7.48E+0	5.46E-1	1.42E+2	-3.20E+1
ODP	[kg CFC11-Eq.]	4.55E-5	9.89E-7	1.06E-6	5.83E-7	1.31E-8	1.02E-7	2.85E-7	-4.89E-6
AP	[kg SO ₂ -Eq.]	1.05E+0	5.91E-2	5.21E-2	1.21E-2	8.14E-4	2.12E-3	1.58E-2	-5.04E-2
EP	[kg (PO ₄) ³ -Eq.]	4.19E-1	7.57E-3	1.01E-2	2.18E-3	2.48E-4	3.82E-4	3.87E-3	-1.05E-2
POCP	[kg ethene-Eq.]	4.80E-2	2.05E-3	3.65E-3	5.12E-4	1.73E-5	8.95E-5	4.45E-4	-4.11E-3
ADPE	[kg Sb-Eq.]	4.20E-1	6.69E-5	4.74E-5	3.07E-5	5.28E-7	5.37E-6	9.98E-6	-4.69E-5
ADPF	[MJ]	3.43E+3	8.14E+1	3.47E+2	4.76E+1	1.38E+0	8.32E+0	2.35E+1	-5.94E+2

Caption: GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources

RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A1: 1 m³ Kaiflex HTplus, Kaiflex HT s2

Parameter	Unit	A1	A2	A3	A4	A5	C2	C4	D
PERE	[MJ]	1.48E+2	1.37E+0	1.06E+1	7.04E-1	2.33E-2	1.23E-1	9.32E-1	-5.18E+0
PERM	[MJ]	0.00E+0	0.00E+0	2.35E+2	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-2.35E+2
PERT	[MJ]	1.48E+2	1.37E+0	2.45E+2	7.04E-1	2.33E-2	1.23E-1	9.32E-1	-2.40E+2
PENRE	[MJ]	1.97E+3	8.36E+1	2.65E+2	4.87E+1	1.17E+2	8.51E+0	1.81E+3	-6.08E+2
PENRM	[MJ]	1.78E+3	0.00E+0	1.16E+2	0.00E+0	-1.16E+2	0.00E+0	-1.78E+3	0.00E+0
PENRT	[MJ]	3.75E+3	8.36E+1	3.80E+2	4.87E+1	1.40E+0	8.51E+0	2.46E+1	-6.08E+2
SM	[kg]	2.15E+0	3.19E-2	5.35E+0	1.70E-2	1.61E-3	2.98E-3	4.71E-2	-5.27E+0
RSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
NRSF	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
FW	[m ³]	5.74E+0	1.60E-2	1.57E-1	9.38E-3	6.90E-4	1.64E-3	1.79E-1	-1.16E-1

Caption: PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A1: 1 m³ Kaiflex HTplus, Kaiflex HT s2

Parameter	Unit	A1	A2	A3	A4	A5	C2	C4	D
HWD	[kg]	1.56E+0	4.30E-3	1.49E-2	1.27E-3	2.82E-5	2.21E-4	3.92E-4	-6.26E-3
NHWD	[kg]	9.97E+0	1.88E+0	1.72E+0	2.28E+0	2.75E+0	3.99E-1	4.65E+1	-1.69E+0
RWD	[kg]	7.27E-3	5.56E-4	4.15E-4	3.36E-4	5.11E-6	5.87E-5	6.95E-5	-3.69E-4
CRU	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	1.37E+1	0.00E+0	0.00E+0	0.00E+0
MFR	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
MER	[kg]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EEE	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0	0.00E+0
EET	[MJ]	0.00E+0	0.00E+0	0.00E+0	0.00E+0	6.94E+1	0.00E+0	1.07E+3	0.00E+0


Caption: HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EEE = Exported thermal energy

Additional Technical scenario:

Biogenic carbon is not included in the results. It enters the product system with wood and cardboard in modules A3 and is 'released' by being an avoided burden in module A5 (declared in module D) and has thus no net-effect on the overall results. The wooden pallet has approximately 23 kg biogenic CO₂, and the cardboard has 16 kg.

6. LCA: Interpretation

Environmental Impacts

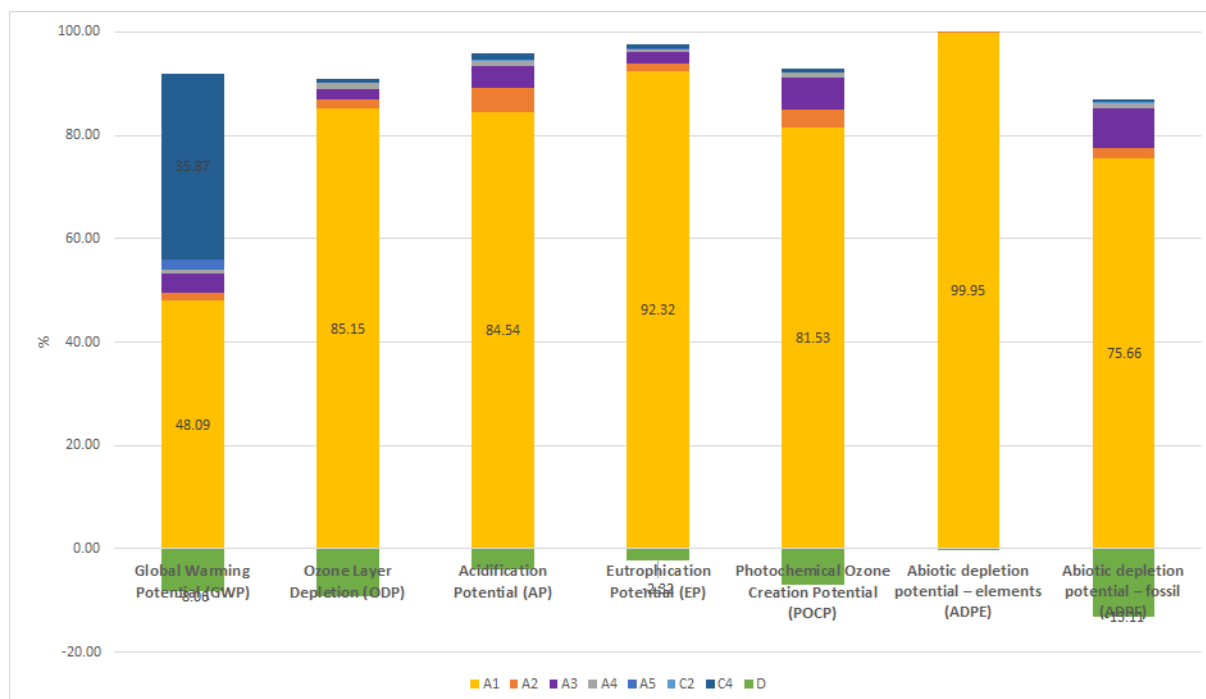

Most environmental impact categories are dominated by module A1 raw material supply. For the global

warming potential, the incineration of the product in module C4 is another major source of greenhouse gas emissions.

7. Requisite evidence

7.1 VOC emissions

The Volatile Organic Compound (VOC) emissions have been tested by Eurofins Product Testing A/S by using the Committee for health-related evaluation of building products/Deutsches Institut für Bautechnik (AgBB/DIBt) test method in 09.2013.

AgBB overview of results (28 days [$\mu\text{g}/\text{m}^3$])

Name	Value	Unit
TVOC (C6 - C16)	<5	$\mu\text{g}/\text{m}^3$
Sum SVOC (C16 - C22)	<5	$\mu\text{g}/\text{m}^3$
R (dimensionless)	<1	-
VOC without NIK	<5	$\mu\text{g}/\text{m}^3$
Carcinogenic Substances	<1	$\mu\text{g}/\text{m}^3$

AgBB overview of results (3 days [$\mu\text{g}/\text{m}^3$])

Name	Value	Unit
TVOC (C6 - C16)	<5	$\mu\text{g}/\text{m}^3$
Sum SVOC (C16 - C22)	<5	$\mu\text{g}/\text{m}^3$
R (dimensionless)	<1	-
VOC without NIK	<5	$\mu\text{g}/\text{m}^3$
Carcinogenic Substances	<1	$\mu\text{g}/\text{m}^3$

7.2 Leaching performance

The concentration of water-soluble chloride ions is 300 mg/kg according to EN 13468.

8. References

Standards

EN 12088

EN 12088:2013, Thermal insulating products for building applications. Determination of long term water absorption by diffusion

EN 13468

EN 13468:2001, Thermal insulating products for building equipment and industrial installations - Determination of trace quantities of water soluble chloride, fluoride, silicate, and sodium ions and pH

EN 13501

Fire classification of construction products and building

elements - Part 1: Classification using data from reaction to fire tests

EN 14304

EN 14304:2009+A1:2013, Thermal insulation products for building equipment and industrial installations - Factory made flexible elastomeric foam (FEF) products - Specification

EN 15804

EN 15804:2012+A1:2013, Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products

ISO 9001

ISO 9001:2015, Quality management systems - Requirements

ISO 14001

ISO 14001:2015-0, Environmental management systems - Requirements with guidance for use

ISO 14025

ISO 14025:2010, Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 50001

ISO 50001:2018-08, Energy management systems - Requirements with guidance for use

Further References

AGBB/DIBt

Deutsches Institut für Bautechnik 2018: Anforderungen an die Innenraumluftqualität in Gebäuden: Gesundheitliche Bewertung der Emissionen von flüchtigen organischen Verbindungen (VVOC, VOC und SVOC) aus Bauprodukten

EEG

Erneuerbare_Energien_Gesetz 2017: Gesetz für den Ausbau erneuerbarer Energien

EnEV

Energieeinsparverordnung 2014: Zweite Verordnung zur Änderung der Energieeinsparverordnung

EuGeos 15804-IA 3.0

LCA database by EuGeos Limited

European waste catalogue

COMMISSION DECISION amending Decision 2000/532/EC on the list of waste pursuant to Directive 2008/98/EC of the European Parliament and of the Council

GreenDelta GmbH

Sustainability Software, Data, and Consulting

openLCA 1.10

open LCA 1.10.2 (2020), Sustainability Software, Databases, and Consulting. Developed by GreenDelta GmbH. <http://www.openlca.org/>

Ordinance on Biocide Products

REGULATION (EU) No 528/2012 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 22 May 2012 concerning the making available on the market and use of biocidal products

PCR Part A

PCR Part A Version 1.8, Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report

PCR Part B

PCR Part B Version 1.6, Requirements on the EPD for insulating materials made of foam plastics

REACH 2006

REGULATION (EC) No 1907/2006 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

Regulation (EU) No. 305/2011 (CPR)

Regulation (EU) No 305/2011 of the European Parliament and of the Council of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC Text with EEA relevance

SVHC 2019

Candidate List of substances of very high concern for Authorisation (SVHC), European Chemicals Agency, Helsinki, Finland

**Publisher**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 3087748- 0
Fax +49 (0)30 3087748- 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

**Programme holder**

Institut Bauen und Umwelt e.V.
Panoramastr 1
10178 Berlin
Germany

Tel +49 (0)30 - 3087748- 0
Fax +49 (0)30 – 3087748 - 29
Mail info@ibu-epd.com
Web www.ibu-epd.com

GreenDELta

**Author of the Life Cycle
Assessment**

GreenDelta GmbH
Kaiserdamm 13
14057 Berlin
Germany

Tel +49 30 6292 4320
Fax -
Mail gd@greendelta.com
Web <https://www.greendelta.com>

**Owner of the Declaration**

Kaimann GmbH
Hansastraße 2-5
33161 Hövelhof
Germany

Tel +49 5257 98 50 - 0
Fax +49 5257 98 50 590
Mail info@kaimann.de
Web <https://www.kaimann.com>