



# SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

**15223-10-1004**

## Stonehenge

Product group: Vinyl - Floor coverings / Wall coverings



**REPUBLIC®**

Republic Floor GmbH  
Lise-Meitner Str. 1  
82152 Krailling



### Product qualities:



*Köttner*  
Helmut Köttner  
Scientific Director  
Freiburg, 02 February 2026



Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## Contents

■ SHI Product Assessment 2024	1
■ QNG - Qualitätssiegel Nachhaltiges Gebäude	2
■ DGNB New Construction 2023	3
■ DGNB New Construction 2018	4
■ BNB-BN Neubau V2015	5
■ EU taxonomy	6
■ BREEAM DE Neubau 2018	7
Product labels	8
Legal notices	9
Technical data sheet/attachments	10

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar





Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## SHI Product Assessment 2024

Since 2008, Sentinel Holding Institut GmbH (SHI) has been establishing a unique standard for products that support healthy indoor air. Experts carry out independent product assessments based on clear and transparent criteria. In addition, the independent testing company SGS regularly audits the processes and data accuracy.

Criteria	Product category	Harmful substance limit	Assessment
SHI Product Assessment	Other floor coverings	TVOC $\leq$ 160 $\mu\text{g}/\text{m}^3$ Formaldehyd $\leq$ 10 $\mu\text{g}/\text{m}^3$	Indoor Air Quality Certified

**Valid until: 27 January 2027**



Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## **QNG - Qualitätssiegel Nachhaltiges Gebäude**

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien	2.2 Resilient floor coverings – including multilayer systems	VOC / Emissions / hazardous substances / polycyclic aromatic hydrocarbons (PAH) / SVHC / heavy metals	QNG ready
<b>Verification:</b> Herstellererklärung vom 6.2.2025 Prüfbericht EPH Nr. 2123071/2024/1 vom 03.09.2024. Konformitätserklärung vom 27.01.2025 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.			



Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## **DGNB New Construction 2023**

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	Assessment
ENV1.1 Climate action and energy (*)	May positively contribute to the overall building score
<b>Verification:</b> EPD 23.02.2024	

Criteria	Assessment
SOC1.3 Sound insulation and acoustic comfort (*)	May positively contribute to the overall building score

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	7 Floor coverings (Resilient floor coverings)	VVOCs, VOC, SVOC emissions and content of hazardous substances	Quality level 3
<b>Verification:</b> Prüfbericht EPH Nr. 2123071/2024/1 vom 03.09.2024. Konformitätserklärung vom 27.01.2025 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt. Herstellerklärung vom 6.02.2025			

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	7 Floor coverings for indoor use (elastic floor coverings)	VVOCs, VOC, SVOC emissions and content of hazardous substances	Quality level 3
<b>Verification:</b> Prüfbericht EPH Nr. 2123071/2024/1 vom 03.09.2024. Konformitätserklärung vom 27.01.2025 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt. Herstellerklärung vom 6.02.2025			

Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## DGNB New Construction 2018

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	7 Floor coverings (Resilient floor coverings)	VOC / SVOC / hazardous substances	Quality level 3

**Verification:** Prüfbericht EPH Nr. 2123071/2024/1 vom 03.09.2024. Konformitätserklärung vom 27.01.2025 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.

Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## **BNB-BN Neubau V2015**

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt	za Elastic floor coverings – with and without bonded underlay or insulation layer	VOC / hazardous substances / heavy metals	Quality level 3

**Verification:** Prüfbericht EPH Nr. 2123071/2024/1 vom 03.09.2024. Konformitätserklärung vom 27.01.2025 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.  
Herstellerklärung vom 6.02.2025



Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## EU taxonomy

The EU Taxonomy classifies economic activities and products according to their environmental impact. At the product level, the EU regulation defines clear requirements for harmful substances, formaldehyde and volatile organic compounds (VOCs). The Sentinel Holding Institut GmbH labels qualified products that meet this standard.

Criteria	Product type	Considered substances	Assessment
DNSH - Pollution prevention and control	Floor coverings (including associated adhesives and sealants)	Substances according to Annex C, formaldehyde, carcinogenic VOCs category 1A/1B	EU taxonomy compliant

**Verification:** Herstellererklärung vom 6.2.2025 Prüfbericht EPH Nr. 2123071/2024/1 vom 03.09.2024. Konformitätserklärung vom 27.01.2025 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.

Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality	Wood-based products	Emissions: Formaldehyde, TVOC, TSVOC, carcinogens	Exemplary quality

**Verification:** Prüfbericht EPH Nr. 2123071/2024/1 vom 03.09.2024. Konformitätserklärung vom 27.01.2025 bestätigt die materielle Übereinstimmung mit dem geprüften Produkt.



Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.



The International EPD® System is a globally recognised programme for the creation and publication of Environmental Product Declarations (EPDs). It enables companies to transparently present the environmental impacts of their products, based on international standards such as ISO 14025 and EN 15804 for construction products. The system provides a standardised method for assessing the environmental performance of products throughout their entire life cycle and promotes sustainable business practices and ecological transparency across various industries.



This product is SHI Indoor Air Quality certified and recommended by Sentinel Holding Institut. Indoor-air-focused construction, renovation, and operation of buildings is made possible by transparent and verifiable criteria thanks to the Sentinel Holding concept.



Products bearing the Sentinel Holding Institute QNG-ready seal are suitable for projects aiming to achieve the "Qualitätssiegel Nachhaltiges Gebäude" (Quality Seal for Sustainable Buildings). QNG-ready products meet the requirements of QNG Appendix Document 3.1.3, "Avoidance of Harmful Substances in Building Materials." The KfW loan program Climate-Friendly New Construction with QNG may allow for additional funding.

Product:

**Stonehenge**

SHI Product Passport no.:

**15223-10-1004**



## Legal notices

(\*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.

---

Find our criteria here: <https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfkriterien%20f%C3%BCr%20Produkte>

---

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar



## Publisher


Sentinel Holding Institut GmbH  
Bötzinger Str. 38  
79111 Freiburg im Breisgau  
Germany  
Tel.: +49 761 590 481-70  
info@sentinel-holding.eu  
www.sentinel-holding.eu

# STONEHENGE

## COLLECTION


**STONE**  
**EMBOSSED**

EIGENSCHAFTEN		STANDARDS	Trilithon
Bodeningeschäften	Gesamtdicke	EN ISO 24346	5,5mm
	Trittschalldämmung	EN ISO 24346	1,5mm (Mit antibakteriell Bio-Guard)
	Verschleißschicht	EN ISO 24340	0,3mm
	Oberfläche		PU Lackierung
	Struktur und Fuge		Micro-bevel
	Installationsmethoden / Velegeart		Unilic Locking - Glueless Floating
Informationen zur Verpackung	Nutzungsklasse	EN 10874 (von EN 16511)	23/34
	Plankengröße (B*L)		304,8mm*609,6mm
	Palettengröße (L*W*H)		1260*980*725mm
	Planken/Packung (Qm/Packung)		12 (2,23 m <sup>2</sup> )
	Gewicht/Packung		19,08kg
	Packung/Palette		48
	Qm/Palette		107
	Qm/Container		2676
	Palette/Container		25
Verhalten bei Hitze	Packung/Container		1200
	Gesamtgewicht/Palette		945kg
	Brandverhalten (CE)	EN 13501-1	Bfl-S1
	Wärmeleitfähigkeit	EN 12667	0,154 W(m·K)
	Wärmedurchlasswiderstand	EN 12667	0,0346 (m <sup>2</sup> ·K)/W
Technische Merkmale	Schüttelung nach Wärmeeinwirkung	EN ISO 23999	≤  0,5  mm
	Fußbodenheizung geeignet		Geeignet, max 27°C
	Aufladungsspannung (CE)	EN 14041	Bestanden (0,5kV)
	Rutschfestigkeit (CE)	EN 13893	DS
	Rutschfestigkeit (Schiefe Ebene)	DIN 51130	R9
	Abriebfestigkeit	EN 15468, Annex A	> 7300 Umdrehungen (≥ 7000 für Klasse 34)
	Verbindungsfestigkeit	ISO 24334	Lange Seite: 4,5 kN/m, kurze Seite: 5,5 kN/m
	Stuhlrollentest	ISO 4918	Bestanden (Typ W, > 25000 Umdrehungen)
	Möbelfußtest	EN ISO 16581	Bestanden
	Mikrokratzbeständigkeit	DIN EN 16094	MSR-A2
Schädliche Stoffe	Resteindruck	EN ISO 24343-1	0,04mm
	Dimensionsstabilität	EN ISO 23999	≤ 0,05%
	Schalldämmung	EN ISO 717-2	ΔLw = 20 dB
	Chemikalieneinwirkung	EN 438-2	Gruppe 1: Klasse 5   Gruppe 2: Klasse 4 Gruppe 3: Klasse 4/5/5
Stoßfestigkeit	Stoßfestigkeit	EN 13329	> 1800mm
	Formaldehydemissionen / VOC	EN 717-1	E1 / VOC Frei
	Greenguard		Bestanden
	Phthalatfrei		Ja

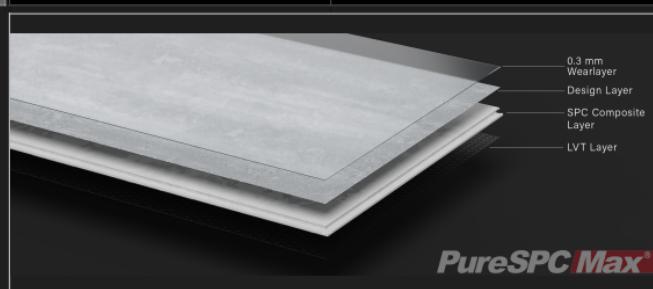
**PureSPC Max®**


# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

EPD OF MULTIPLE PRODUCTS, BASED ON WORST-CASE RESULTS

VINYL FLOORING (LVT, SPC, WPC)

REPUBLIC FLOOR GMBH

Programme: The  
International EPD®  
System,  
[www.environdec.com](http://www.environdec.com)

Programme  
operator: EPD  
International AB

EPD registration  
number: S-P-11665

Publication date:  
2024-02-23

Valid until:  
2029-02-23

Geographical  
scope: China  
and Europe

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).



# GENERAL INFORMATION

## COMPANY INFORMATION

Owner of the EPD	Republic Floor GmbH
Address	Lise-Meitner-Str.1, 82152 Krailling, München, Germany
Contact details	heansuh.lee@republicflooreu.com
Website	www.republicflooreu.com

## PRODUCT IDENTIFICATION

Product name	Vinyl flooring (LVT, SPC, WPC)
Additional label(s)	None
Product number / reference	None
Place(s) of production	China
CPC code	36910 Floor coverings of plastics, in rolls or in the form of tiles

## EPD INFORMATION

EPD programme	The International EPD® System
Address	EPD International AB Box 210 60, SE-100 31 Stockholm, Sweden
E-mail	info@environdec.com
EPD standards	This EPD is in accordance with EN 15804:2012 +A2:2019/AC:2021 and ISO 14025:2010 standards.
Product category rules	The CEN standard EN 15804 serves as the core PCR. In addition, the Int'l EPD System PCR 2019:14 Construction products, version 1.3.2 (2023-12-08) and c-PCR-004 Resilient, textile and laminate floor coverings (EN 16810:2017), version (2019-12-20) is used.
EPD author	Sally Xie, Intertek
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
Verification date	2024-02-23
EPD verifier	Rui Wang, IVL Swedish Environmental Research Institute
EPD number	S-P-11665
ECO Platform nr.	-
Publishing date	2024-02-23
EPD valid until	2029-02-23

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

# PRODUCT INFORMATION

## PRODUCT DESCRIPTION

Vinyl flooring product is made primarily from polyvinyl chloride (PVC), calcium carbonate (limestone), plasticizers, additives (such as pigments, stabilizers, lubricants, foaming agent, etc.). It is composed of one clear PVC embossed wear layer with a final UV coating, printing film layer for décor, substrate layer for structural strength and stability, and may include a backing (such as IXPE or Cork) to improve acoustic performance and increase comfort underfoot. The product is waterproof, easy to install and maintain.

In this EPD, it covers three types of vinyl flooring, LVT (luxury vinyl tile flooring), SPC (stone plastic composite vinyl flooring), and WPC (wood plastic composite vinyl flooring). All these three types of floorings are belonged to the vinyl flooring family. They were considered as similar products as they were manufactured by the same manufacturing site with the same major steps in the core processes. In this EPD, the result of each declared environmental performance indicator was based on the worst-case result of the included products, for the included modules from A to C.

## PRODUCT APPLICATION

The products provide the primary function of flooring for interior applications. The flooring products are used in various residential and commercial applications including retail, healthcare, education, and hospitality.

## TECHNICAL SPECIFICATIONS

Characteristics	LVT	SPC	WPC
Product thickness, mm	6.0	8.0	10.5
Wear layer thickness, mm	0.5	0.5	0.5
Backing thickness, mm	None	1.5mm IXPE	1.5mm Cork
Product weight, kg/m <sup>2</sup>	11.235	13.8	10.459
Product form, tiles or planks	Width, mm	83~610	83~610
	Length, mm	100~2000	450~2200
		83~610	100~2000

## PRODUCT STANDARDS

EN ISO 10582:2018, EN ISO 10874:2012, EN 14041:2004/AC:2006(CE), EN 14041:2018, EN 16511:2014+A1:2019

## PHYSICAL PROPERTIES OF THE PRODUCT

Characteristics	Test Method	Properties
Wear resistance, IP	EN 13329	≥ 4000 cycles
Wear resistance, IP	EN 15468	≥ 7000 cycles
Impact resistance (big ball)	EN 13329	≥ 1800mm
Castor chair resistance	ISO 4918	25000 cycles
Effect of furniture leg (type 0)	ISO 16581	No visible damage
Residual indentation	EN ISO 24343-1	≤0.3mm
Locking strength	ISO 24334	≥ 1.5 kN/m
Resistance to staining	EN 438-2	Grade 5
Colour fastness to artificial light	ISO 105-B02	≥Grade 6
Dynamic coefficient of friction	EN 13893	> 0.3
Reaction to fire	EN 13501-1	Class Bfl

## ADDITIONAL TECHNICAL INFORMATION

Further information can be found at [www.republicflooreu.com](http://www.republicflooreu.com).

## PRODUCT RAW MATERIAL AND PACKAGING COMPOSITION

### Materials of Product and packaging for 1m<sup>2</sup>

Product components	Weight, kg	Post-consumer material, weight - %	Biogenic material, weight % and kg C/kg
UV coating	0.015	0%	0%
Wear layer	PVC	0.457	0%
	DOTP	0.1645	0%
	Additives	0.0285	0%
Printing film	PVC	0.072	0%
	Additives	0.018	0%
	PVC	1.830-2.680	0%
Substrate	Calcium carbonate	5.790-9.676	0%
	Others	0.304-0.792	0%
	Adhesive for IXPE	0-0.015	0%
Backing - IXPE	Backing - IXPE	0-0.150	0%
	Adhesive for Substrate	0-0.062	0%
	Adhesive for Cork	0-0.050	0%
Backing - Cork	Backing - Cork	0-0.330	100%, 0.5400 kg C/kg
	TOTAL	10.459-13.800	0-3.1552%, 0-0.0170 kg C/kg
	Packaging materials	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Wood pallet	0.2250	1.6304%	0.3905
Corrugated board box	0.2300	1.6667%	0.3982
Packaging film	0.0036	0.0312%	0
TOTAL	0.4586	3.3283%	0.3913
Dangerous substances from the candidate list of SVHC for Authorisation	EC No.	CAS No.	Weight-% per functional unit
None	None	None	0%

# PRODUCT LIFE-CYCLE

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. The study also considers the material losses occurring during the manufacturing processes as well as handling of waste formed in the production processes at the manufacturing facilities.

The product stage of the vinyl flooring is divided into 3 modules: A1 “Raw material and supply”, A2 “Transport to the manufacturer” and A3 “Manufacturer”. The aggregation of the modules A1, A2 and A3 is a possibility considered by the EN 15804 standard. This rule is applied in this EPD.

A1, Raw material supply takes into account the extraction and processing of all raw materials and energy which occur upstream to the studied manufacturing process. Specifically, vinyl flooring raw material supply covers sourcing of PVC resin, calcium carbonate(limestone), plasticizers, additives (such as pigments, stabilizers, lubricants, foaming agent, etc.), wear layer, printing film, and backing (IXPE and Cork). Electricity and Heating is taken account for at least country specific mix.

The raw materials Calcium stearate and Zinc stearate of stabilizer for LVT, SPC, WPC were not in the background database, the stearic acid, zinc oxide and quicklime from Ecoinvent database was used for Stoichiometric calculation.

The raw material CPVC (Chlorinated Polyvinyl Chloride) for WPC product was not in the background database, it was substituted with PVC (Polyvinylchloride) from Ecoinvent database.

Sensitivity analysis is conducted in this study.

A2, Transport to the manufacturer. The transportation of the raw materials to the manufacturing site is studied in this module.

A3, Manufacturing. The manufacturing process of vinyl flooring product mainly includes:

Substrate preparation, the raw materials are first mixed and heated. The mixture is then calendered or extruded into a sheet to create substrate.

Laminating, the substrate is laminated with a printing film and wear layer.

UV coating, the semi-finished product is coated with a lacquer.

Cutting, the semi-finished product is cut into tiles or planks.

Profiling, the edge treatment is processed.

Backing attaching, an acoustic backing (IXPE or Cork) is bonded on the back side of the product if required.

Packaging, the finished product is packed into the corrugated board box, stacked on the wood pallet, and wrapped around with packaging film.

Quality checks are made at each step of the production process.

The environmental profile of these energy carriers (State Grid and Heat Corporation) is modelled for local conditions.

Packaging-related flows in the production process are included in the manufacturing module, i.e., packaging film, wood pallet and corrugated board box. Apart from production of packaging material, the supply and transport of packaging material are also considered in the LCA model.

Manufacturing site: Jiangsu Zhengyoung Flooring Decoration Material Co., Ltd.  
Address: No.32 Cuibei, Henglin Town, Wujin District, Changzhou, Jiangsu, China

## TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

The construction process is divided into 2 modules: A4 “Transport to the building site” and A5 “Installation in the building”.

A4, Transport to the building site. This module includes transport from the production gate to the building site. Transport is calculated on the basis of a scenario with the parameters described. The average transportation distance from production plant to building site is 929 km transported by lorry and 10525 nautical miles (i.e., 19492 km) transported by ship.

A5, Installation in the building occur in this stage. Installation of the vinyl flooring is accomplished using hand tools with no energy consumption and associated emissions. During installation, approximately 5% of the vinyl flooring is lost as off-cuts. The additional production processes to compensate the loss is considered in this study. All flooring losses are collected for landfill disposal.

The impacts associated with packaging disposal are included with the installation phase. The packaging waste includes wood pallet, packaging film, and corrugated board box in A5. The end of life of packaging scenario is followed EU 27 waste management scenario.

Packaging	Recycling	Landfill	Incineration
Wood pallet	31.9%	19%	49.1%
Packaging film	37.6%	19%	43.4%
Corrugated board box	81%	19%	0%

## PRODUCT USE AND MAINTENANCE (B1-B7)

This comprises the stages B1 to B7, but for floor coverings only stage B2 is considered as specified in the c-PCR.

The reference service life (RSL) of the vinyl flooring product is 15 years for commercial general use as stated by the manufacturer. The service life of the flooring may vary depending on the amount and nature of flooring traffic and the type and frequency of maintenance. This RSL is applicable as long as the product use complies with that defined by EN ISO 10582:2018 and EN ISO 10874:2012 for commercial general use.

### Maintenance stage (B2)

According to the manufacturer, typical maintenance involves regular sweeping and damp mopping. The present assessment is based on a recommended weekly cleaning schedule including sweeping and mopping with a neutral detergent. The B2 scenario is as below, and the impact is studied with RSL of 15 years.

Parameter	Value	Unit
Maintenance process	weekly damp mopping	-
Water consumption	5.2	L/m <sup>2</sup> /year
Clean detergent consumption	0.0104	kg/m <sup>2</sup> /year

## PRODUCT END OF LIFE (C1-C4, D)

The end-of life stage is divided into 4 modules: C1 “De-construction, demolition”, C2 “Transport to waste processing”, C3 “Waste processing for reuse, recovery and/or recycling”, C4 “Disposal”.

C1, De-construction. According to the manufacturer, the vinyl flooring can be manually removed from the floor. Hence no impact is considered during demolition (C1).

C2, Transport to waste processing. It is estimated that there is no mass loss during the use of the product, therefore the end-of-life product is assumed that it has the same weight with the declared product. All of the end-of-life product is assumed to be transported as separate construction waste to the closest facilities. Transportation distance to the closest disposal area is estimated as 100 km and the transportation method is lorry which is the most common.

C3, Waste processing for reuse, recovery and/or recycling. It is assumed 100% of the deconstructed vinyl flooring products (C1) to be sent to landfill. Hence, no waste processing is required.


C4, Disposal. The 100% of the deconstructed vinyl flooring products are assumed to be sent to landfill.

D, Reuse/recovery/recycling potential.

100% of vinyl flooring products are assumed to be sent to landfill.

No benefit or load resulting from reuse/recovery/recycling beyond the product system boundary.

## MANUFACTURING PROCESS

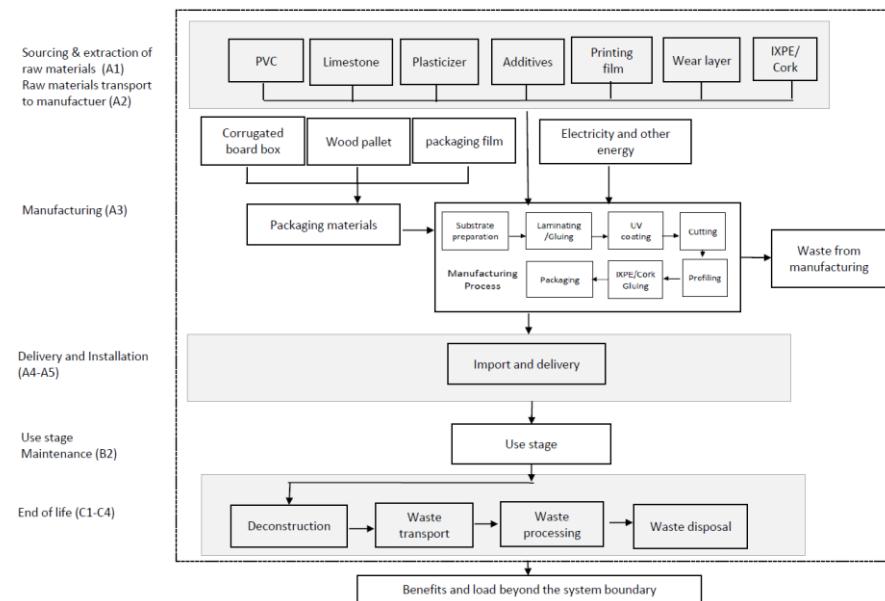

# LIFE-CYCLE ASSESSMENT

## LIFE-CYCLE ASSESSMENT INFORMATION

Period for data 2022

### FUNCTIONAL UNIT

Functional unit 1m<sup>2</sup>

Mass per functional unit  
 LVT: 11.235 kg  
 SPC: 13.800 kg  
 WPC: 10.459 kg

Reference service life 15 years

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

#### Biogenic carbon content

Biogenic carbon content in product, kg C 0

Biogenic carbon content in packaging, kg C 0.18

### SYSTEM BOUNDARY

The system boundary is the cradle to grave and module D (A + B + C + D). All life cycle stages are analysed in the study, including: A1-A3 product stage, A4-A5 construction process stage, B use stage, C1-C4 end-of-life stage, and D benefits and loads beyond the system boundary.

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	Product stage				Construction process stage		Use stage						End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	
Modules declared	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	x	D
Geography	CN	CN	CN	CN to EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU
Specific data used	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	-7% to 14%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

## CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the EN 15804:2012+A2:2019 and the applied PCR. The study does not exclude any hazardous materials or substances.

The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation.

In this study, as per EN 15804, allocation is conducted in the following order;

1. Allocation should be avoided.
2. Allocation should be based on physical properties (e.g., mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

Allocation used in Ecoinvent 3.8 environmental data sources follows the methodology 'allocation, cut-off by classification'. This methodology is in line with the requirements of the EN 15804-standard.

For data sets in this study, the allocation of the inputs is generally carried out via the mass. The consumption and transportation of raw materials was allocated by mass ratio.

In this study one allocation occurs on vinyl flooring products production, in allocating the input and output, i.e. energy within the production site such as electricity, natural gas and some other raw material such as water, emission such as off gas and waste water, among the various series of flooring products, allocation is done via total production (floor area with the unit as  $m^2$ ) of all products produced on a yearly average.

During the production process of vinyl flooring, there are no other by-products produced from the production line, hence there is no occasion that requires allocation for multi-output processes.

For this project, there is only one production site. So, there is no allocation among plants.

## ENVIRONMENTAL IMPACT DATA PER FUNCTIONAL UNIT (1m<sup>2</sup>)

### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> eq.	1.90E+01	3.86E+00	2.00E+00	0.00E+00	6.49E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.30E-01	0.00E+00	2.15E+00	0.00E+00
GWP-fossil	kg CO <sub>2</sub> eq.	2.10E+01	3.86E+00	1.23E+00	0.00E+00	6.12E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.30E-01	0.00E+00	7.27E-02	0.00E+00
GWP-biogenic	kg CO <sub>2</sub> eq.	-1.03E+00	0.00E+00	0.00E+00	0.00E+00	1.39E-17	0.00E+00	2.09E+00	0.00E+00							
GWP-Luluc	kg CO <sub>2</sub> eq.	8.88E-02	2.37E-03	4.55E-03	0.00E+00	3.69E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.78E-05	0.00E+00	6.86E-05	0.00E+00
ODP	kg CFC 11 eq.	9.79E-06	8.05E-07	5.28E-07	0.00E+00	7.69E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.98E-08	0.00E+00	2.94E-08	0.00E+00
AP	mol H <sup>+</sup> eq.	1.06E-01	9.03E-02	8.95E-03	0.00E+00	4.02E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.48E-04	0.00E+00	6.83E-04	0.00E+00
EP-freshwater	kg P eq.	9.89E-04	1.95E-05	5.07E-05	0.00E+00	3.70E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.06E-06	0.00E+00	7.62E-07	0.00E+00
EP-marine	kg N eq.	2.18E-02	2.25E-02	2.13E-03	0.00E+00	1.17E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.63E-04	0.00E+00	2.37E-04	0.00E+00
EP-terrestrial	mol N eq.	2.21E-01	2.50E-01	2.21E-02	0.00E+00	8.62E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.80E-03	0.00E+00	2.60E-03	0.00E+00
POCP	kg NMVOC eq.	6.73E-02	6.57E-02	6.21E-03	0.00E+00	2.24E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.75E-04	0.00E+00	7.57E-04	0.00E+00
ADP-minerals & metals*	kg Sb eq.	2.04E-04	6.53E-06	1.06E-05	0.00E+00	1.03E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.04E-07	0.00E+00	1.67E-07	0.00E+00
ADP-fossil*	MJ	3.49E+02	5.15E+01	1.98E+01	0.00E+00	9.31E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.95E+00	0.00E+00	1.99E+00	0.00E+00
WDP*	m <sup>3</sup>	8.80E+00	1.81E-01	4.61E-01	0.00E+00	7.95E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.70E-03	0.00E+00	6.32E-03	0.00E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential. Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption															

\*Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

## ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG	kg CO <sub>2</sub> eq.	2.11E+01	3.86E+00	1.23E+00	0.00E+00	6.49E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.30E-01	0.00E+00	7.28E-02	0.00E+00

## USE OF RESOURCES

Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	6.70E+01	4.36E-01	3.38E+00	0.00E+00	2.07E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.19E-02	0.00E+00	1.73E-02	0.00E+00	
PERM	MJ	1.52E+01	0.00E+00	-1.63E+00	0.00E+00											
PERT	MJ	8.22E+01	4.36E-01	3.38E+00	0.00E+00	2.07E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.19E-02	0.00E+00	-1.61E+00	0.00E+00	
PENRE	MJ	2.42E+02	5.15E+01	1.45E+01	0.00E+00	8.35E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.95E+00	0.00E+00	1.99E+00	0.00E+00	
PENRM	MJ	1.07E+02	0.00E+00	-8.54E+01	0.00E+00											
PENRT	MJ	3.49E+02	5.15E+01	1.45E+01	0.00E+00	8.35E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.95E+00	0.00E+00	-8.38E+01	0.00E+00	
SM	kg	4.04E-01	2.02E-02	2.13E-02	0.00E+00	5.04E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.40E-04	0.00E+00	4.19E-04	0.00E+00	
RSF	MJ	1.32E-01	9.25E-05	6.59E-03	0.00E+00	7.37E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.45E-06	0.00E+00	1.09E-05	0.00E+00	
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	
FW	m3	2.18E-01	4.51E-03	1.12E-02	0.00E+00	9.69E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.52E-04	0.00E+00	2.18E-03	0.00E+00	
Acronyms		PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water														

## END OF LIFE – WASTE

Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	1.71E+00	6.96E-02	8.91E-02	0.00E+00	5.24E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.58E-03	0.00E+00	0.00E+00	0.00E+00	
Non-hazardous waste disposed	kg	2.26E+01	7.71E-01	1.98E+00	0.00E+00	9.36E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.24E-02	0.00E+00	1.38E+01	0.00E+00	
Radioactive waste disposed	kg	4.39E-04	3.57E-04	3.79E-05	0.00E+00	2.11E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.30E-05	0.00E+00	0.00E+00	0.00E+00	

## END OF LIFE – OUTPUT FLOWS

Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00														
Materials for recycling	kg	0.00E+00														
Materials for energy recovery	kg	0.00E+00														
Exported energy, electricity	MJ	0.00E+00														
Exported energy, thermal	MJ	0.00E+00														

## SCENARIO DOCUMENTATION

### Manufacturing energy scenario documentation

Scenario parameter	Value
Electricity data source and quality	LCA study for Reference product: electricity, medium voltage, China, Ecoinvent, year: 2021
Electricity CO <sub>2</sub> e / kWh	1.06
District heating data source and quality	LCA study for Reference product: heat, district or industrial, natural gas, World, Ecoinvent, year: 2021
District heating CO <sub>2</sub> e / kWh	0.1393

Int'l EPD System PCR 2019:14 Construction products, version 1.3.2 (2023-12-08) and c-PCR-004 Resilient, textile and laminate floor coverings (EN 16810:2017), version: 2019-12-20

Zhengyoung LCA background report 2024-01-04

## BIBLIOGRAPHY

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations. Principles and procedures.

ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.

ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.

Ecoinvent 3.8 (Allocation, cut-off, EN 15804) and One Click LCA database.

EN 15804:2012+A2:2019/AC:2021 Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.

## ABOUT THE COMPANY

Republic Floor GmbH specializes in the distribution across Europe of innovative flooring solutions, focusing on cutting-edge materials such as SPC, LVT and WPC. The company offers a diverse range of high-quality flooring products, including imitation wood grain and stone grain options.

With state-of-the-art manufacturing facilities, Republic Floor GmbH operates multiple modern production lines. The company boasts an impressive monthly production capacity, capable of reaching 800 standard containers. This translates to nearly 1.6 million square meters of flooring produced each month, showcasing their commitment to meeting market demands.

Through continuous and steady development over recent years, Republic Floor GmbH has achieved remarkable success, consistently setting new performance records. The company's dedication to quality and innovation has contributed to its growing reputation as a leading player in the flooring industry.

## EPD AUTHOR AND CONTRIBUTORS

<b>Owner of the EPD</b>	Republic Floor GmbH
<b>EPD author</b>	Sally Xie, Intertek
<b>EPD verifier</b>	Rui Wang, IVL Swedish Environmental Research Institute
<b>EPD program operator</b>	EPD International AB
<b>Background data</b>	This EPD is based on Ecoinvent 3.8 (Allocation, cut-off, EN 15804) and One Click LCA databases.
<b>LCA software</b>	The LCA and EPD have been created using One Click LCA Pre-Verified EPD Generator for Construction products

# VERIFICATION STATEMENT

## VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with EN 15804, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The background report (project report) for this EPD

Why does verification transparency matter? [Read more online.](#)

## VERIFICATION OVERVIEW

Following independent third party has verified this specific EPD:

EPD verification information	Answer
Independent EPD verifier	Rui Wang, IVL Swedish Environmental Research Institute
EPD verification started on	2024-01-08
EPD verification completed on	2024-02-23
Approver of the EPD verifier	The International EPD System

Author & tool verification	Answer
EPD author	Sally Xie, Intertek
EPD author training completion	2022-11-04
EPD Generator module	Construction products
Independent software verifier	Ugo Pretato, Studio Fieschi & soci
Software verification date	2021-05-11

## THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of

- the data collected and used in the LCA calculations,
- the way the LCA-based calculations have been carried out,
- the presentation of environmental data in the EPD, and
- other additional environmental information, as present

with respect to the procedural and methodological requirements in ISO 14025:2010 and EN 15804:2012+A2:2019/AC:2021.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Rui Wang, IVL Swedish Environmental Research Institute



# HERSTELLERERKLÄRUNG

Hiermit bestätigen wir:



Republic Floor GmbH

Lise-Meitner-Strasse 1

82152 Krailling

für das folgende Produkt / die folgenden Produkte:

Bigger 5 (SPC/LVT), Elements XTended (SPC/LVT)

Alligator (WPC)

Stonehenge (SPC)

QNG – Schadstoffvermeidung in Baumaterialien (Version 1.3, Korrekturfassung v. 14.09.2023)

Nach Position 2.2 *Elastische Bodenbeläge – auch mehrschichtige Systeme*:

Das Produkt/ Erzeugnis/ mindestens ein Teilerzeugnis enthält Stoffe der Kandidatenliste (Version zum Ausstellungsdatum) oberhalb 0,1 Massen%:	<b>nein</b>
Einhaltung des AgBB-Schemas	<b>ja</b>
Reproduktionstoxische Phthalate < 0,10 %	<b>ja</b>
keine Zinn-, Cadmium- und Bleistabilisatoren	<b>ja</b>

EU- Taxonomie Verordnung Zur Bestätigung der Konformität gemäß Anlage C zur Vermeidung und Verminderung der Umweltverschmutzung gemäß der Delegierten Verordnung (EU) 2023/2486 der Kommission vom 27. Juni 2023.

Das Produkt/Erzeugnis/mindestens ein Teilerzeugnis enthält weitere CMR-Stoffe der Kategorie 1A oder 1B, die nicht auf der Kandidatenliste stehen, oberhalb von 0,1 Massen-% in mindestens einem Teilerzeugnis :	<b>Nein</b>
---	-------------

Chlorparaffine (SCCPs + MCCPs + LCCPs) < 0,1 %	Ja
--	----

**REPUBLIC FLOOR GMBH**

Lise-Meitner-Str. 1

82152 Krailling

Tel.: +49 (0) 2921 6600670

E-Mail: info@republicflooreu.com

*Krailling 6.7.25 B. Schmidt*

Ort, Datum, Unterschrift, Stempel

Ihr Ansprechpartner für Rückfragen:

Name: Christian Schmidt Telefon: 0152 27580624

Mailadresse: C.Schmidt@republicflooreu.com