



SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

14189-10-1022

Funderplan

Product group: Wood & Wood materials - Floor coverings / Wall coverings - Wood fiber

Fundermax
For you to create

Fundermax GmbH
Klagenfurter Straße 87-89
9300 St. Veit/Glan



Product qualities:



Köttner

Helmut Köttner
Scientific Director

Freiburg, 02 February 2026



Contents

 SHI Product Assessment 2024	1
 QNG - Qualitätssiegel Nachhaltiges Gebäude	2
 DGNB New Construction 2023	3
 DGNB New Construction 2018	5
 BNB-BN Neubau V2015	6
 EU taxonomy	7
 BREEAM DE Neubau 2018	8
Product labels	9
Legal notices	10
Technical data sheet/attachments	10

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar





Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

SHI Product Assessment 2024

Since 2008, Sentinel Holding Institut GmbH (SHI) has been establishing a unique standard for products that support healthy indoor air. Experts carry out independent product assessments based on clear and transparent criteria. In addition, the independent testing company SGS regularly audits the processes and data accuracy.

Criteria	Product category	Harmful substance limit	Assessment
SHI Product Assessment	Wood materials	TVOC $\leq 300 \mu\text{g}/\text{m}^3$ Formaldehyd $\leq 36 \mu\text{g}/\text{m}^3$	Indoor Air Quality Certified
Valid untill: 30 April 2030			



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

QNG - Qualitätssiegel Nachhaltiges Gebäude

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien	9.1 Wood-based materials (plywood, OSB, and HPL)	Formaldehyde / VOC / emissions / hazardous substances / SVHC: boron compounds	QNG ready
Verification: Natureplus-Zertifikat vom 05.11.2025 . Natureplus-Vergabekriterien sind laut Richtlinie 5010 - Emissionsarme Bauprodukte, Ausgabe: 22-05 vom 24. März 2023 konform mit dem AgBB-Schema und geben einen Formaldehydgrenzwert von $\leq 0,03 \text{ mg/m}^3$ vor (Seite 6). Laut Richtlinie 5001 - Chemikalienrichtlinie, Ausgabe: 22-05 vom 18. Juli 2022 sind SVHC > 0,1% (Seite 2) und reproduktionstoxische Stoffe (Seiten 3-4) verboten			

Criteria	Assessment
ANF2-WG1 Nachhaltige Materialgewinnung	May positively contribute to the overall building score
Verification: FSC- und PEFC Zertifikate vom 11.07.2023	



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

DGNB New Construction 2023

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	48 Timber construction and prefabricated wooden houses	Formaldehyde emissions	Quality level 4

Verification: NaturePlus Zertifikat vom 05.11.2025. NaturePlus Richtlinie 5010 - Emissionsarme Bauprodukte, Ausgabe: 22-05 vom 24. März 2023 gibt einen Formaldehydgrenzwert von $\leq 0,03 \text{ mg/m}^3$ vor (Seite 6)

Criteria	Quality level
ENV1.3 Responsible resource extraction	May positively contribute to the overall building score

Verification: FSC- und PEFC Zertifikate vom 11.07.2023

Criteria	Assessment
SOC1.3 Sound insulation and acoustic comfort (*)	May positively contribute to the overall building score

Criteria	Assessment
SOC1.2 Indoor air quality (*)	May positively contribute to the overall building score

Verification: SHI-Schadstoffgeprüft



Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	48 Timber construction: Wood-based materials	Formaldehyde emissions	Quality level 4
Verification: NaturePlus Zertifikat vom 05.11.2025 NaturePlus Richtlinie 5010 - Emissionsarme Bauprodukte, Ausgabe: 22-05 vom 24. März 2023 gibt einen Formaldehydgrenzwert von $\leq 0,03 \text{ mg/m}^3$ vor (Seite 6)			



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

DGNB New Construction 2018

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	48 Timber construction and prefabricated wooden houses	Formaldehyde	Quality level 4

Verification: NaturePlus Zertifikat vom 05.11.2025. NaturePlus Richtlinie 5010 - Emissionsarme Bauprodukte, Ausgabe: 22-05 vom 24. März 2023 gibt einen Formaldehydgrenzwert von $\leq 0,03 \text{ mg/m}^3$ vor (Seite 6)



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

BNB-BN Neubau V2015

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt	41 Wood-based panels according to EN 13986, such as chipboard, plywood, fiberboard, medium-density fiberboard (MDF), plywood, solid wood panels, and OSB panels, as well as veneer plywood	VOC / formaldehyde / hazardous substances	Quality level 4

Verification: Prüfbericht des Instituts Bremer Umweltinstitut vom 23.05.2022 / Prüfbericht Nr. L 5905 FM. Herstellererklärung vom 25.06.2025.

Criteria	Assessment
1.1.7 Nachhaltige Materialgewinnung	May positively contribute to the overall building score

Verification: FSC- und PEFC Zertifikate vom 11.07.2023



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

EU taxonomy

The EU Taxonomy classifies economic activities and products according to their environmental impact. At the product level, the EU regulation defines clear requirements for harmful substances, formaldehyde and volatile organic compounds (VOCs). The Sentinel Holding Institut GmbH labels qualified products that meet this standard.

Criteria	Product type	Considered substances	Assessment
DNSH - Pollution prevention and control		Substances according to Annex C	EU taxonomy compliant
Verification: SHI-Schadstoffgeprüft			



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality	Wood-based products	Emissions: Formaldehyde, TVOC, TSVOC, carcinogens	Exemplary quality
Verification: Prüfbericht des Instituts Bremer Umweltinstitut vom 23.05.2022 / Prüfbericht Nr. L 5905 FM			



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.



The German natureplus label is awarded to construction products that consist predominantly of renewable or mineral raw materials. The stringent test criteria, developed and supervised by an independent expert commission, include sustainable and socially responsible production, a quality-assured and healthy building and usage phase, as well as environmentally sound disposal.



The PEFC label certifies wood and wood products from sustainably managed forests and requires, among other things, legal origin, protection of forest ecosystems, and social minimum standards in forestry. Environmental organisations consider PEFC's criteria to be less strict than those of FSC, particularly regarding the protection of sensitive forest areas. Health-related aspects of the final product are not part of the PEFC assessment.



The Forest Stewardship Council (FSC) label is awarded to products made wholly or partly from wood sourced from responsibly managed and controlled forestry. Health-related aspects of the final product are not part of the FSC assessment.



Product:

Funderplan

SHI Product Passport no.:

14189-10-1022

Fundermax
For you to create

Legal notices

(*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.

Find our criteria here: <https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfverfahren/kriterien%20f%C3%BCr%20Produkte>

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar



Publisher

Sentinel Holding Institut GmbH
Bötzingen Str. 38
79111 Freiburg im Breisgau
Germany
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

BeA ist der starke Partner für industrielle Befestigungstechnik

BeA Befestigungssysteme finden Sie auf der ganzen Welt. Als einer der führenden Hersteller von Druckluftnaglern und industriellen Befestigungsmitteln ist die BeA Gruppe seit über 100 Jahren ein verlässlicher Partner für die Verpackungs-, Möbel- und Bauindustrie sowie für Automobilhersteller und -zulieferer.

Unsere Nagel- und Klammergeräte sowie unsere Befestigungsmittel (Nägel, Klammern, Schrauben, Holzverbinder, etc.) bilden zusammen mit einem herausragenden Kundenservice ein System von höchster Qualität und Zuverlässigkeit.

BeA ist Mitglied in folgenden Verbänden:



BeA Systeme für die Befestigung von FunderPlan auf Holzuntergründen

BeA Klammernagler




180/65-835 C
(Kontaktauslösung)
Art. Nr. 12000500

Klammer 180/45 VZ HZ

Stark verzinkte Bauklammer
(Art. Nr. 10004835)

Die BeA 180er Klammer in VZ HZ gibt es in Längen 45 - 65 mm. In A4 in den Längen 50 und 63 mm.

BeA Klammern der Type 180 in den Ausführungen A4 HZ (nicht rostend) und VZ HZ (stark verzinkt) verfügen über eine ETA und sind konform nach Eurocode 5.



BeA Systeme für die Befestigung von FunderPlan auf Holzuntergründen

BeA Coilnagler



903 DC
(Kontaktauslösung)
Art. Nr. 12100470

903 DC
(Einzelauslösung)
Art. Nr. 12100598

TC 2,5 x 50 BK Ring

Kunststoffgebundener TC Nagel
(Art. Nr. 10600607)

Die BeA Kunststoffbindung sorgt für eine reibungslose und effiziente Verarbeitung mit wenigen Arbeitsunterbrechungen.

Kunststoffgebundene Nägel sind im Baustelleneinsatz robust und unempfindlich.



BeA Systeme für die Befestigung von FunderPlan auf Holzuntergründen

BeA Klammernagler im Skater System



180/65-835 C
(Kontaktauslösung)
Art. Nr. 12000625 (Klammernagler)
Art. Nr. 14412430 (Skaterbasis)

BeA Skater System

Eine Basis für drei Geräte

Die Skaterbasis gibt es in zwei Ausführungen (Standard und kurze Abstände) und ist mit drei Geräten kompatibel. Neben dem 180/65-835 C können auch der BeA 14/65-830 C (Klammern der Typen 14, 16, 155) und der Coilnagler DC/90-902C (BDC Rundkopfnägel) eingesetzt werden.

- Flexibel einsetzbar
- Schnell, sicher und rationell

Sonderzubehör:

- Kantenanschlag (Art. Nr. 14412428)
- Standgriff (Art. Nr. 14412429)
- Führungsschiene 3,0 m (Art. Nr. 14406482)
- Führungsschiene 3,5 m (Art. Nr. 14409063)

Befestigungshinweise FUNDERMAX FunderPlan mit BeA Klammern und Nägeln

THE POWER OF FASTENING

FunderPlan

Das biologische Element im Holzbau

Wirtschaftliche Verlegeplatte für den Innenausbau zur Verkleidung und Beplankung von Wänden, Dachelementen, Dachschrägen, Dachböden und vieles mehr.

Eine formschlüssige fugenlose Verbindung ermöglicht ein schnelles und einfaches Endlosverlegen. Mit dem stabilen **Nut- und Federprofil** sind auch „fliegende Stöße“ realisierbar. Die FunderPlan Verlegeplatte eignet sich auch für den Feuchtebereich.

- als tragende und aussteifende Beplankung für Wand, Dach und Decke
- zur optischen Verkleidung
- auf Wohngesundheit geprüft
- empfohlen für Kindergärten und Schulen
- zertifiziert von natureplus, IQUH und Sentinel Haus Institut
- frei von Terpenen
- frei von unnatürlichen Emissionen

Rundum laufende Nut & Feder
Standard-Format:
625 x 2600 mm / 1250 x 2600 mm
Stärke: 8,00 mm
Verpackung: 50 Stück bzw. 25 Stück/Palette
(= 81,25 m²)




FunderPlan

Standard 3-Feld-Platte

FunderPlan gewährleistet nachweislich ein Leben, Wohnen und Arbeiten ohne Belastung durch unnatürliche Emissionen und das vor allem auch bei Projekten wie Kindergärten, Schulen oder wo gesundheitlich besonders sensible Menschen betroffen sind. FunderPlan schafft optimale Lebensraumqualität und wirkt sich sowohl positiv auf Behaglichkeit und Hygiene, als auch auf die Gesundheit von Bewohnern und Nutzern aus, das Raumklima wird zum Erlebnis.

Für die werkseitig auszuführende aussteifende Beplankung (statische Scheibe) von Holzrahmenbauten empfehlen wir die 3-Feld-FunderPlan, das Original, in stumpfer Ausführung. Für die bauseitig auszuführende Beplankung empfehlen wir die Verlegeplatte im Format 1250 x 2600 mm.

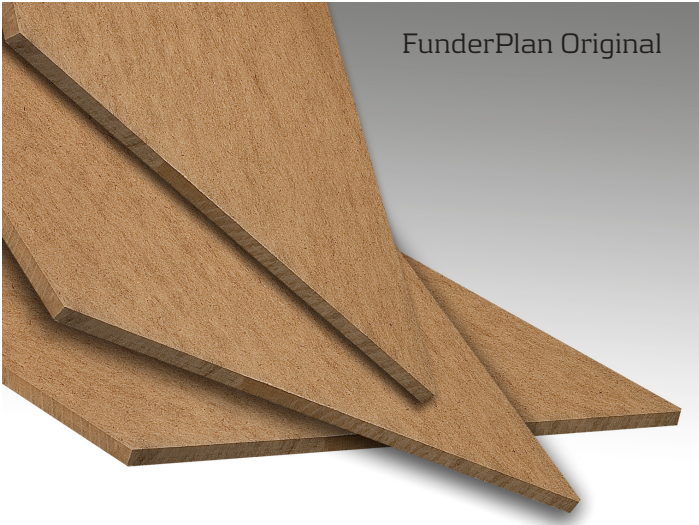

FunderPlan Bauphysik

Statische Eigenschaften	Prüfverfahren/ Bezugsnorm	Einheit	Wert
E-Modul (E _{o, mean})	EN 310	N/mm²	4.600
Biegefestigkeit	EN 310	N/mm²	38
Charakteristische Lochleibungs- festigkeit (Ø 1,8 mm) lt. Norm	EN 1995-1-1	N/mm²	87,6
Charakteristische Lochleibungs- festigkeit (Ø 1,5 mm) gemessen	ON EN 383		130,3
Charakteristische Lochleibungs- festigkeit (Ø 3,0 mm) lt. Norm	EN 1995-1-1	N/mm²	75,1
Charakteristische Lochleibungs- festigkeit (Ø 3,0 mm) gemessen	ON EN 383		94,7
Schubfestigkeit f _{v,k}	EN 12369-1	N/mm²	16
Modifikationswert k _{mod} (KLD: Kurz; NKL1)	EN 1995-1-1	-	0,85

Statische Eigenschaften	Prüfverfahren/ Bezugsnorm	Einheit	Wert
Rohdichte	EN 323	kg/m³	>1.000
Dicke	EN 324-1	mm	8,0
Querkzugfestigkeit	EN 319	N/mm³	> 0,65
Dickenquellung (24h)	EN 317	%	<12
Plattenfeuchte	EN 322	%	>6
Formaldehyd	EN 717-1	mg/m³	<0,03
s _d -Wert	DIN 4108	m	1,48
Formate	2.640 x 1.875 mm 2.820 x 1.875 mm (Standardformat) 3.000 x 1.875 mm 5.640 x 1.875 mm 625 x 2.600 mm (Nut & Feder) 1.250 x 2.600 mm (Nut & Feder)		

FunderPlan Bauphysik

Befestigung (Ø 1,8 mm Klammer)	min.	max.
Klammerabstand (S _R)	2,7 cm	14,4 cm
Klammerabstand (S _M)	-	28,8 cm
Mindestabstand beanspruchter Rand (a _{4,l})	0,54 cm	-
Bemessungswert des Widerstandes der Wand (F _{l,w,Rd})	38,76 kN	7,26 kN
PRÜFPARAMETER (NACH NATUREPLUS)	Grenz- wert ↑ g/m³	Konzen- tration ↑ g/m³
Summe flüchtige organische Verbindungen (TVOC)	≤ 300	123
Summe bicyclische Terpene	≤ 200	n.n.
R-Wert	≤ 1	0,246
Emissions-Untersuchungen nach Natureplus Richtlinie 0208 "Harte und mittelharte Holzfaserplatten", TÜV Süd Industrie Service GmbH - Prüfbericht: 130207-1. Weit unter gesetzlichen Bestimmungen.		



- Allgemeine Befestigungsempfehlung:
- Klammerdrahtdurchmesser mind. 1,8 mm
 - Nageldurchmesser mind. 2,5 mm
 - Klammerabstände siehe Tabelle
 - Vertikale Verarbeitung
 - Betriebsdruck 6,0 bis 6,5 bar
(Druckminderer empfohlen)

Kontakt

BeA GmbH

Industrielle Befestigungssysteme

Bogenstraße 43 – 45, D-22926 Ahrensburg

Tel. +49 (0) 4102 78 – 444

info@bea-group.com

BeA GmbH

Zweigniederlassung Österreich

Marktstrasse 3, A-2331 Vösendorf

Tel.: +43 (0) 1 699 27 01 – 0

info@at.bea-group.com

www.bea-group.com

FunderMax GmbH

Klagenfurter Straße 87 – 89,
A-9300 St. Veit/Glan
Tel.: +43 (0) 5/9494 – 0
Fax: +43 (0) 5/9494 – 4200
Mail: office@fundermax.at

www.fundermax.at

Eine hochverdichtete, stabile und harte Holzfaserplatte benötigt etwas Aufmerksamkeit bei der Befestigung. Die FunderPlan wird regulär mit Klammern oder Nägel auf Holzriegelkonstruktionen befestigt.

Hinweise und Empfehlungen zur Befestigung der FunderPlan.

Befestigung mit der Klammer:

- Bei der Klammer ist eine Materialstärke von 1,8mm Draht erforderlich, um eine ordentliche und möglichst oberflächenbündige Versenkung des Klammerrückens in der Platte zu erhalten. Es entsteht rein optisch eine leichte Aufwulstung mit Holzfasern, ohne technische Relevanz.
- Es werden Klammern Typ Q (nicht rostend bzw. stark verzinkt) mit entsprechender Bauzulassung empfohlen. Die Klammerlänge mit 45mm ist für FunderPlan ausreichend.
- Ein passendes Luftdruck-Klammergerät für die Verwendung von 1,8mm Drahtstärke für 45mm Klammerlänge ist hierbei ebenfalls erforderlich (nicht jedes Gerät kann 1,8mm verarbeiten). Alternativ zu den Handgeräten ist die Verarbeitung der Klammer natürlich auch mit einem Skater-, Inliner-, oder Slider-System möglich. Im industriellen Holzbau wird FunderPlan oftmals mit einer Nagelbrücke befestigt.
- Der Ideale und empfohlene Luftdruck beträgt ca. 6,0 – 6,5 bar. Er ist abhängig von der Länge und Dicke des Luftdruckschlauches. Auch das Kesselvolumen des Kompressors spielt dabei eine Rolle. Deshalb ist jeweils eine individuelle Einstellung und entsprechende Feinjustierung notwendig, um optimale Ergebnisse zu erzielen. Für einen gleichmäßigen Luftdruck am Befestigungsgerät wird idealerweise direkt am Gerät ein separater Druckminderer gesetzt (sehr empfohlen).
- Der Mindestabstand zum Plattenrand beträgt nur 5,4 mm und bedarf deshalb keiner besonderen Aufmerksamkeit.

Befestigung mit Nagel:

- Die Empfehlung lautet hier einen 2,5mm verzinkten Rillennagel zu verwenden. Auch der Nagel sollte möglichst oberflächenbündig in der Platte versenkt werden. Hierbei entsteht gegenüber der Klammer keine Aufwulstung an der Oberfläche, die ursprüngliche Optik der Platte bleibt erhalten.
- Die Verwendung von kunststoffgebundenen Rillennägeln gibt die Sicherheit, keine Drahtabspannung zu bekommen und unterstützt damit den Charakter vom verletzungsfreien Be- und Verarbeiten der FunderPlan. Die Kunststoffverbindung sorgt auch für eine reibungslose und effiziente Verarbeitung, sie ist im Baustelleinsatz robust und unempfindlich.
- Die Länge von 50 mm für den TC-Rillennagel 2,5 mm ist für FunderPlan ausreichend.
- Zur Verarbeitung der kunststoffgebundenen Rillennägel ist ein passender Coil-Druckluftnagler erforderlich, der auch Kunststoffbänder als Trägermaterial verarbeiten kann.
- Der Ideale und empfohlene Luftdruck beträgt ca. 6,0 – 7,0 bar. Er ist abhängig von der Länge und Dicke des Luftdruckschlauches. Auch das Kesselvolumen des Kompressors spielt dabei eine Rolle. Deshalb ist jeweils eine individuelle Einstellung und entsprechende Feinjustierung notwendig, um optimale Ergebnisse zu erzielen. Für einen gleichmäßigen Luftdruck am Befestigungsgerät wird idealerweise direkt am Gerät ein separater Druckminderer gesetzt (sehr empfohlen).
- Der Mindestabstand zum Plattenrand beträgt nur 7,5 mm und bedarf deshalb keiner besonderen Aufmerksamkeit.

Befestigung mit Schraube:

- Die Befestigung der FunderPlan für Revisionszwecke kann auch mittels Schrauben erfolgen.
- Für eine oberflächenbündige Befestigung sind Schrauben mit Frästaschen am Schraubenkopf erforderlich. Empfohlene Schraubendimension: 4,5 x 50 mm

Befestigung durch Verklebung:

- Für Sonderanwendungen (z.B. nichtsichtbare Befestigung, etc.) gibt es die Möglichkeit der Verklebung der FunderPlan auf eine Holzriegelkonstruktion.

Wir möchten, dass die Verarbeitung und Verwendung der FunderPlan-Biofaserplatten im Holzbau gut funktioniert und bieten Ihnen deshalb gerne unterstützenden technischen Support an. Sprechen Sie uns bitte darauf an.

FunderMax GmbH

Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria

has been assessed and certified as meeting the requirements of

FSC™ Chain-of-Custody

The company was assessed against the following standards

FSC-STD-40-004 V3-1 - Chain of Custody Certification

FSC-STD-40-003 V2-1 Chain of Custody Certification of Multiple Sites – November 2014

FSC-STD-40-005 V3-1 Requirements for Sourcing FSC Controlled Wood – February 2017

FSC-STD-40-007 V2-0 Sourcing reclaimed material for use in FSC Product Groups or FSC Certified Projects – April 2011

FSC-STD-50-001 Requirements for use of the FSC trademarks by Certificate Holders

for the products detailed in the scope below:

The Scope of Registration appears on page 2 of this certificate

This certificate is valid from 11 July 2023 until 26 September 2026 and remains valid subject to satisfactory surveillance audits.

Issue 7. Certified since 23 September 2010

This is a multi-site certification. Additional site details are listed on the subsequent page.



Authorised by
Sylvie Seisun

Authorised by
Christian Kobel

SGS Société Générale de Surveillance SA
1, Place des Alpes, 1201 Geneva, Switzerland
t +41 (0)22 739 91 11 - www.sgs.com

The validity of this certificate shall be verified on <http://info.fsc.org/> For the full list of product groups covered by the certificate see <http://info.fsc.org/> This certificate itself does not constitute evidence that a particular product supplied by the certificate holder is FSC-certified [or FSC Controlled Wood]. Products offered shipped or sold by the certificate holder can only be considered covered by the scope of this certificate when the required FSC claim is clearly stated on sales and delivery documents. The certificate remains the property of SGS. The certificates and all copies or reproductions shall be returned or destroyed if requested by SGS



This document is an authentic electronic certificate for Client' business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | [SGS](#). Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



FSC™ Chain-of-Custody

Einkauf von Industrierundholz, Sägenebenprodukten, Altholz und Papier; FSC 100%, FSC Mix, FSC Controlled Wood, Controlled Wood, Pre-Consumer und Post-Consumer Reclaimed. Herstellung und Verkauf von Holzplatten FSC Mix, FSC Controlled Wood sowie Compact Laminaten, FSC Mix, FSC Recycled und FSC Controlled Wood, Kredit System, mehrere Standorte und Auslagerungen von Zuschnittarbeiten.

Ein- und Verkauf (Handel) von Holzplatten, Compact Laminaten, Faserplatten und Spezialpapieren, FSC Mix, FSC Recycled und FSC Controlled Wood, Transfersystem, mehrere Standorte.

Purchase of industrial roundwood, sawmill by-products, wood waste and paper; FSC 100%, FSC Mix, FSC Controlled Wood, Controlled Wood, Pre-Consumer und Post-Consumer Reclaimed. Production and sale of wood panels, FSC Mix, FSC Controlled Wood and compact laminates, FSC Mix, FSC Recycled and FSC Controlled Wood, credit system, multisite and outsourcing of cutting work.

Purchase and sale (trade) of wood panels, compact laminates, fibreboards and special papers, FSC Mix, FSC Recycled und FSC Controlled Wood, transfer system, multisite.



This document is an authentic electronic certificate for Client* business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



FunderMax GmbH



FSC™ Chain-of-Custody

Issue 7
Sites
FunderMax GmbH Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria
FunderMax GmbH Bickfordstraße 6, 7201 Neudörf, Austria
FunderMax GmbH Industriezentrum NÖ-Süd, 2355 Wiener Neudorf, Austria
Fundermax Swiss AG Industriestraße 38, 5314 Kleindöttingen, Switzerland
Baufeld Austria GmbH Viktringer Ring 28, 9020 Klagenfurt, Austria



This document is an authentic electronic certificate for Client* business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | [SGS](#). Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



Certificate SGSCH-PEFC-COC-110073

The Organization

SGS

FunderMax GmbH

Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria

has been assessed and certified as meeting the requirements of

PEFC - Chain of Custody

PEFC ST 2002:2020 – “Chain of Custody of Forest and Tree Based Products – Requirements” - dated 14/02/2020

PEFC ST 2001:2020 - PEFC Trademarks Rules – Requirement – dated 14/02/2020.

as amended and published on www.pefc.org

For the products detailed in the scope below:

Einkauf von Industrierundholz, Sägereiestholz Recyclingholz und Papier x% PEFC, PEFC Controlled Sources und Controlled Sources.

Herstellung, Vertrieb, und Verkauf von Holzplatten und Compact Laminaten x% PEFC nach der Kreditmethode mehrere Standorte.

Ein- und Verkauf von Papier mit der Methode der physischen Trennung.

Purchase of industrial roundwood, sawmill by-products, recycled wood and paper x% PEFC, PEFC Controlled Sources and Controlled Sources.

Production, distribution and sale of wooden panels and compact laminates x% PEFC using the credit method at several locations.

Buying and selling paper using the physical separation method.

This certificate is valid from 11 July 2023 until 02 August 2026 and remains valid subject to satisfactory surveillance audits.

Issue 7 Certified since 03 August 2016

This is a multi-site certification.

Additional member details are listed on the subsequent page.



Authorised by
Sylvie Seisun

Authorised by
Christian Kobel

SGS Société Générale de Surveillance SA
1, Place des Alpes, 1201 Geneva, Switzerland
t +41 (0)22 739 91 11 - www.sgs.com

More detailed product specifications covered by the scope of this certificate are provided on the PEFC Certificate Database <https://www.pefc.org/find-certified>. Organisations with a valid PEFC chain of custody certificate can only use the PEFC Logo with unique PEFC license logo number based on PEFC Logo usage license contract issued by the PEFC Council or another entity authorised by the PEFC Council and in accordance with the PEFC logo usage rules.



This document is an authentic electronic certificate for Client* business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | SGS. Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



FunderMax GmbH

SGS

PEFC - Chain of Custody

Additional facilities

Issue 7
Sites
FunderMax GmbH Klagenfurter Straße 87-89, 9300 St. Veit/Glan, Austria
FunderMax GmbH Bickfordstraße 6, 7201 Neudörf, Austria
FunderMax GmbH Industriezentrum NÖ-Süd, 2355 Wiener Neudorf, Austria
Fundermax Swiss AG Industriestraße 38, 5314 Kleindöttingen, Switzerland
Baufeld Austria GmbH Viktringer Ring 28, 9020 Klagenfurt, Austria



This document is an authentic electronic certificate for Client* business purposes use only. Printed version of the electronic certificate are permitted and will be considered as a copy. This document is issued by the Company subject to SGS General Conditions of certification services available on [Terms and Conditions](#) | [SGS](#). Attention is drawn to the limitation of liability, indemnification and jurisdictional clauses contained therein. This document is copyright protected and any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful.



Fundermax

Fundermax GmbH
Klagenfurter Straße 87–89
9300 St. Veit/Glan
Österreich

T +43 5 9494 0
F +43 5 9494 4200

office@fundermax.at
www.fundermax.at

St. Veit/Glan, 25. Juni 2025

Erklärung zur REACH – Verordnung betreffend Produkte von FunderMax

Die REACH – Verordnung EG Nr. 1907/2006 regelt den Umgang mit chemischen „Stoffen“ und „Zubereitungen“ in der EU.

Alle **Platten und Lamine von FunderMax** sind **Erzeugnisse** nach REACH Artikel 3 (3). Sie enthalten **keine verbotenen** oder beschränkten **Stoffe nach Anhang XVII** der REACH-Verordnung. Die Erzeugnisse weisen unter vernünftigerweise vorhersehbaren Verwendungsbedingungen **keine beabsichtigte Freisetzung** von Stoffen auf. Weiters enthalten Platten und Lamine von FunderMax **weder in Anhang XIV gelistete Stoffe, noch Stoffe der Kandidatenliste nach Artikel 59 (1)** größer als 0,1 Masseprozent. Folglich besteht nach REACH Artikel 7 (1) **keine Verpflichtung zur Registrierung** von in den Erzeugnissen enthaltenen Stoffen.

Der Abgleich mit der aktuellen Kandidatenliste erfolgt regelmäßig nach den Erfordernissen der REACH-Verordnung. Wir kennen die Verpflichtung nach REACH Artikel 33 (1). Wir werden in Zukunft unseren Abnehmern bei Änderung der Kandidatenliste bzw. der oben genannten Anhänge zeitnah Informationen zur Verfügung stellen, falls hierdurch Inhaltsstoffe unserer Erzeugnisse betroffen sind.

Diese Erklärung gilt zur Gänze auch für alle durch FunderMax ausgelieferten **Verpackungsmaterialien**.

Für Sie als Kunde ergibt sich kein Handlungsbedarf im Sinne der REACH – Verordnung.

FunderMax GmbH
Dipl.-Ing. Isabel Sonnleithner
Director Innovation Management





Internationaler Verein für zukunftsfähiges
Bauen und Wohnen e.V.

CERTIFICATE

for the award of the quality label

ZERTIFIKAT

über die Vergabe des Qualitätszeichens

CERTIFICAT

pour l'attribution du label de qualité

Approved products
Geprüfte Produkte
Produits testés

Biofaser-ST, Biofaser-STX, FunderPlan

Licensee
Lizenznehmer
Licencié

FunderMax GmbH
Klagenfurter Straße 87-89
9300 St. Veit an der Glan
Österreich

Type of product
Produktart
Type de produit

Hard and medium wood-fibre boards
Harte und mittelharte Holzfaserplatten
Panneaux rigides et semi-rigides en fibres de bois

Certificate number
Zertifikatsnummer
Numéro de certificat

0208-1304-120-1

Scope of assessment
Prüfumfang
Étendue du test

CLIMATE PROTECTION
KLIMASCHUTZ
PROTECTION DU CLIMAT

HEALTHY LIVING
WOHNGESUNDHEIT
SANTÉ DE L'HABITAT

RESOURCE CONSERVATION
RESSOURCENSCHONUNG
PRÉSERVATION DES RESSOURCES

Product data
Produktdaten
Données sur le produit



Further information on the product, scope of testing and label recognition.
Weitere Informationen zu Produkt, Prüfumfang und Labelanerkennung.
Plus d'informations sur le produit, l'étendue du contrôle et la reconnaissance du label.
<https://natureplus-label.org/cert?id=0208-1304-120-1>

Validity of the certificate
Gültigkeit des Zertifikats
Validité du certificat

04/2030

Neckargemünd, 2025-11-05

Tilmann Kramolisch
natureplus e.V.
Lizenzvergabe | Licensing | Licences

Felix Konrad
natureplus Institute SCE mbH
Prüfinstitut | Test Institute | Institut de contrôle